DIGITUS®

Enjoy connections. Live.

MAIN CATALOG
WITH 43 NEW PRODUCTS

October 2006

Microscope Camera - Page 25

Combo KVM-Switch - Page 38

Wireless LAN USB 2.0 Adapter – Page 3

ATX Power-Supply Tester - Page 13

Table of contents

MIMO Wireless Lan Products ..... p. 3
Wireless LAN Products IEEE 802.11g, 54Mbps ..... p. 4
Wireless LAN Products IEEE 802.11g, 54Mbps ..... p. 5
Wireless LAN Products IEEE 802.11g+, 108Mbps ..... p. 6
Wireless Lan Antennas ..... p. 7
Internet Broadband Router / Print Server ..... p. 8
Multifunctionsserver / Printserver / Digital Media LAN Center ..... p. 9
10/100 Fast Ethernet ..... p. 10
10/100/1000 Gigabit Ethernet ..... p. 11
Internet / Network Cameras ..... p. 12
Powerline Network / Power Supply Tester ..... p. 13
USB Hubs / Frontpanel ..... p. 14
Card Reader / Notebook Cooler ..... p. 15
External Enclosures ..... p. 16
External Enclosures ..... p. 17
HDD Frames / Cables and Adapters ..... p. 18
USB Accessories ..... p. 19
USB, Firewire and Network Cards ..... p. 20
USB, Firewire and Network Cards ..... p. 21
iPod® Products ..... p. 22
Multimedia Products ..... p. 23
Skype Products ..... p. 24
Multimedia Accessories ..... p. 25
Multimedia Products ..... p. 26
Multimedia Products / Accessories ..... p. 27
Mice and Keyboards ..... p. 28
Bluetooth Products ..... p. 29
GPS Products ..... p. 30
Travel Accessories ..... p. 31
Smart Travel and Backpacks, Professional Line - Bags ..... p. 32
Smart Travel and Backpacks, Business Line - Bags ..... p. 33
CD/DVD-Cases, Floppy Drive ..... p. 34
SOHO KVM Switches ..... p. 35
KVM Switches ..... p. 36
KVM Switches ..... p. 37
KVM Switches ..... p. 38
Video Splitter ..... p. 39
19" Consoles ..... p. 40
19" Network Cabinets ..... p. 41
19" Wall Mounting Cabinets ..... p. 42
Network Accessories ..... p. 43
Installation Cables ..... p. 44
CAT 5e Patchcables ..... p. 45
Computer Cables in Digitus Blister ..... p. 46
Point of Sale Promotion ..... p. 47

Higher speed

MIMO XR technology offers you higher actual data transfer rates up to 35Mbps. That means up to 30% higher data throughput than with comparable products using the 802.11G standard. MIMO XR allows a more constant data transmission rate, particularly for large multimedia files. This ensures flawless transmission of video streams.

Better Connection

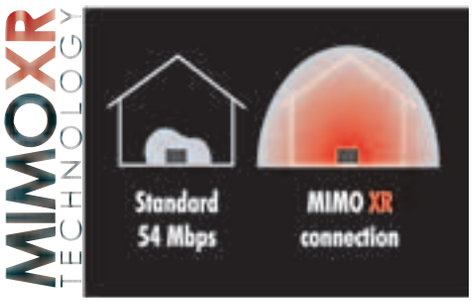

MIMO XR technology not only offers you greater range but a more reliable connection as well. The number of "dead spots" during use within closed rooms is significantly reduced. The result is an optimal Wireless LAN signal throughout the entire area.

Higher Range

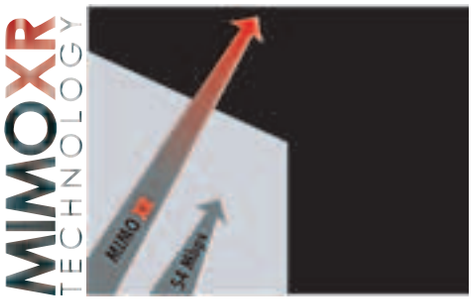

Thanks to the "Smart Antenna" technology that operates with 3 antennas, MIMO XR technology offers a significantly increased range. For indoor applications you have up to 2 times greater range and for output applications up to 4 times greater range than with the typical products using the 11G standard.

DIGITUS® MIMO Wireless LAN Broadband Router, IEEE 802.11g, 54 Mbps

NEW!

- MIMO technology
- IEEE 802.11b, IEEE 802.11g, IEEE 802.3 and IEEE 802.3u compatible
- Supported Wireless LAN data rates 54,48,36,22,11,5.5,2.0,1.0 Mbps
- 128 Bit WEP (wired equivalent privacy) encryption
- Wireless fidelity protected access (WPA)
- Ralink-Chipset
- External Smart Antenna with Two RX and One TX
- Broadband routing and IP sharing via xDSL or cable modem
- Comprehensive SPI Anti-DoS Firewall
- NAT/NAPT IP Sharing
- DHCP Server, VPN Pass Through

MIMOXR TECHNOLOGY

DN-7049 MIMO Wireless LAN Broadband Router

DIGITUS® MIMO Wireless LAN Cardbus Adapter, IEEE 802.11g, 54 Mbps

NEW!

- MIMO technology
- IEEE 802.11b and IEEE 802.11g compatible
- 32 bit PC card compatible
- Supported data rates 54/48/36/24/18/12/11/9/6/5.5/2/1Mbps
- 128 bit WEP (Wired equivalent privacy) encryption
- Wireless fidelity protected access (WPA)
- Ralink-Chipset
- Internal Smart Antenna with Two RX and One TX
- Suitable for all current network environments
- Support for Windows 98SE/ME/2000/XP

MIMOXR TECHNOLOGY

DN-7041 MIMO Wireless LAN Cardbus Adapter

DIGITUS® MIMO Wireless LAN PCI Adapter, IEEE 802.11g, 54 Mbps

NEW!

- MIMO technology
- IEEE 802.11b and IEEE 802.11g compatible
- 32 bit PCI compatible
- Supported data rates 54/48/36/24/18/12/11/9/6/5.5/2/1Mbps
- 128 bit WEP (Wired equivalent privacy) encryption
- Wireless fidelity protected access (WPA)
- Ralink-Chipset
- External Smart Antenna with Two RX and One TX
- Suitable for all current network environments
- Support for Windows 98SE/ME/2000/XP

MIMOXR TECHNOLOGY

DN-7046 MIMO Wireless LAN PCI Adapter

DIGITUS® XR Wireless LAN USB 2.0 Adapter, IEEE 802.11g, 54Mbps

NEW!

- Wireless LAN XR USB 2.0 adapter, MIMO compatible
- Extended range, multiple antenna technology for best signal quality
- Supports IEEE 802.11g/b – 54 / 11 Mbps Wireless LAN standards
- Indoor range 35~100M, outdoor range 100~300M
- 128 / 64 bit WEP encryption, WPA and WPA2
- Ralink Chipset
- Signal LED for Power / RX / TX
- Compliant to USB 2.0 / USB 1.1
- Driver support for WIN98SE/ME/2000/XP

MIMOXR TECHNOLOGY compatible

DN-7043 XR Wireless LAN USB Adapter

DIGITUS® Wireless LAN Broadband ADSL2+ Modem Router, IEEE 802.11g, 54 Mbps

- Integated Modem for Annex B
- ITU-T G.992.3 G.992.4 für ADSL2
- Downstream up to 24 Mbps and Upstream up to 2Mbps
- Compatible to DSL and ADSL
- IEEE 802.11b, IEEE 802.11g, IEEE 802.3 and IEEE 802.3u compatible
- Supported Wireless LAN data rates 54, 11, 5.5, 2.0, 1.0 Mbps
- 128 Bit WEP (wired equivalent privacy) encryption
- Wireless fidelity protected access (WPA)
- Broadband routing and IP sharing via xDSL or cable modem
- Comprehensive NAT / SPI firewall

NEW!

ADSL2+

DN-7016 Wireless LAN Broadband ADSL2+ Modem Router

DIGITUS® Wireless LAN Broadband Router IEEE 802.11g, 54 Mps

- Usable for DSL / Cable - Modem
- Wireless LAN IEEE 802.11g, 54Mbps
- 128-bit WEP Encryption
- Indoor range approx. 35~100m, outdoor range 100~300m
- 4-port 10/100M Ethernet switch
- Auto MDI / MDI X Fast Ethernet switch
- NAT & SPI Firewall security, DOS detection
- VPN IPSec, L2TP Pass-Through Support
- DDNS and SNMP Support
- DHCP server support

NEW!

DN-7017 Wireless LAN Broadband Router

DIGITUS® Wireless LAN Access Point, IEEE 802.11g, 54Mbps

- Adds High-Speed Wireless Access to the Wired Network
- Wireless LAN IEEE 802.11g/b, up to 54Mbps
- Supports WDS repeater mode, AP client mode and bridging mode
- 128-bit WEP encryption, WPA / WPA2 security
- ESSID authentication / MAC address control
- Supports roaming link integrity
- Built in DHCP Server
- Web-based configuration

NEW!

DN-7018 Wireless LAN Access Point

DIGITUS® WIFI Finder with LC Display incl. Wireless LAN Adapter, IEEE 802.11g, 54 Mbps

- LC Display shows: Number of Access Points, Wi-Fi standard, Channel, SSID, encryption and Signal strength
- Shows several Access Points in the Wireless LAN environment
- Blue lightend, easy to read LC Display
- Integrated rechargeable long life battery, charged over the USB Port
- Easy to use, Simple function keys on the device
- Integrated USB Wireless LAN Adapter based on Zydas chipset
- IEEE 802.11b and IEEE 802.11g compatible
- Supported data transfer rate 54,11,5.5,2.0,1.0 Mbps
- Security: 64/128/256-bit WEP Data Encryption, WPA/WPA2 (TKIP with IEEE 802.1x) and AES
- Suitable for all current network environments
- Support for Windows XP,2000

NEW!

DIGITUS
USB 2.0 WI-FI WLAN DETECTOR STICK
• LC Display shows: Number of Access Points, Wifi standard, Channel, SSID, encryption and Signal strength
• Shows several Access Points in the WLAN environment
• Blue lightend, easy to read LC Display
• Integrated rechargeable long life battery charged over the USB
• Easy to use, Simple function
the device
• Integrated USB WL
Adapter based on Zy
chipset
USB 2.0



DN-7020 Wi-Fi Finder / Wireless LAN Adapter

DIGITUS® Wireless LAN Cardbus Adapter, PC Card, IEEE 802.11g, 54Mbps

NEW!

- IEEE 802.11b and IEEE 802.11g compatible
- 32 bit PC card compatible
- Supported data rates 54, 11, 5.5, 2.0, 1.0 Mbps
- 128 bit WEP (Wired equivalent privacy) encryption
- Support for WPA and WPA2
- Ralink-Chipset
- Suitable for all current network environments
- Support for Windows 98SE/ME/2000/XP

DN-7001GR Wireless LAN Cardbus Adapter

DIGITUS® Wireless LAN PCI Adapter, IEEE 802.11g, 54Mbps with external Antenna

NEW!

- IEEE 802.11b and IEEE 802.11g compatible
- 32 bit PC card compatible
- Supported data transfer rates 54,11,5.5,2.0,1.0 Mbps
- 128-bit WEP (Wired equivalent privacy) encryption
- Support for WPA and WPA2
- Ralink-Chipset
- Suitable for all current network environments
- Support for Windows 98SE/ME/2000/XP

DN-7006GR Wireless LAN PCI Adapter

DIGITUS® USB 2.0 Wireless LAN Adapter, IEEE 802.11g, 54Mbps

NEW!

- IEEE 802.11b and IEEE 802.11g compatible
- Compliant to USB 2.0 standard
- Supported data transfer rates 54,11,5.5,2.0,1.0 Mbps
- 128-bit WEP (Wired equivalent privacy) encryption
- WPA and WPA2 encryption (Wireless fidelity protected access)
- Realtek Chipset
- Suitable for all current network environments
- Support for Windows 98SE/ME/2000/XP

DN-7003GS Wireless LAN USB 2.0 Adapter

DIGITUS® Wireless LAN Broadband Router IEEE 802.11g+, 108Mbps

- IEEE 802.11b, IEEE 802.11g, IEEE 802.3 and IEEE 802.3u compatible
- Wi-Fi compliant
- Supported Wireless LAN data rates 108,96,72,54,48,36,22,11,5.5,2.0,1.0 Mbps
- 128 Bit WEP (wired equivalent privacy) encryption
- Wireless fidelity protected access (WPA)
- Atheros-Chipset
- Broadband routing and IP sharing via xDSL or cable modem
- Comprehensive SPI Anti-DoS Firewall
- NAT/NAPT IP Sharing
- DHCP Server, VPN Pass Through
- Support UPnP, DDNS, Firmware Upgrade
- 1 x RJ 45 WAN, 4 x RJ 45 (LAN)
- Detachable Antenna
- Suitable for all current network environment

DN-7039-A Wireless LAN Broadband Router

DIGITUS® Wireless LAN Cardbus Adapter, IEEE 802.11g+, 108Mbps

- IEEE 802.11b, IEEE 802.11g, IEEE 802.11g+ (Super G) compatible
- PCI 32 Bit / 33 MHz compatible
- Supported data rates 108, 54, 11, 5.5, 2.0, 1.0 Mbps
- 128 bit WEP (Wired equivalent privacy) encryption
- Wireless fidelity protected access (WPA)
- Atheros-Chipset
- Suitable for all current network environment
- Support for Windows 98SE/ME/2000/XP

DN-7036-A Wireless LAN PCI Adapter

DIGITUS® Wireless LAN Cardbus Adapter, IEEE 802.11g+, 108Mbps

- IEEE 802.11b, IEEE 802.11g, IEEE 802.11g+ (Super G) compatible
- 32 bit PC card compatible
- Supported data rates 108, 54, 11, 5.5, 2.0, 1.0 Mbps
- 128 bit WEP (Wired equivalent privacy) encryption
- Wireless fidelity protected access (WPA)
- Atheros-Chipset
- Suitable for all current network environment
- Support for Windows 98SE/ME/2000/XP

DN-7031-A Wireless LAN Cardbus Adapter

DIGITUS® Wireless LAN USB 2.0 Adapter, IEEE 802.11g+, 108Mbps

- IEEE 802.11b, IEEE 802.11g, IEEE 802.11g+ (Super G) compatible
- Compliant with USB 2.0 standard
- Supported data transfer rates 108, 54,11,5.5,2.0,1.0 Mbps
- 128-bit WEP (Wired equivalent privacy) encryption
- WPA encryption (Wireless fidelity protected access)
- Atheros-Chipset
- Suitable for all current network environment
- Support for Windows 98SE/ME/2000/XP

DN-7033-A Wireless LAN USB 2.0 Adapter

DIGITUS® Wireless LAN rod antenna

- Wireless LAN high performance rod antenna
- Gain: 5.0 dBi (reception)
- Omnidirectional
- Suitable for IEEE 802.11a,b,g
- Connected via SMA socket reversed
- Length 19.7cm, diameter 12mm
- Suitable for all DIGITUS® Wireless LAN products

DN-70100 Rod Antenna, 5dBi

DIGITUS® Wireless LAN rod antenna

- Wireless LAN high performance rod antenna
- Omnidirectional type
- Gain: 7,0 dBi (reception)
- Suitable for 2,4GHz Wireless LAN - IEEE 802.11b / g
- Connected via SMA male reversed
- Length 30cm, diameter 1,3 cm
- Suitable for all DIGITUS® Wireless LAN products

DN-70104 Rod Antenna, 7dBi
DN-70105 Rod Antenna, 9dBi

DIGITUS® Wireless LAN patch antenna

- Wireless LAN high performance patch antenna
- Gain: 10.0 dBi
- Directional antenna
- Suitable for IEEE 802.11a,b,g
- Connection via SMA jack
- Dimensions H 10,0 cm x W 7,5 cm x H 2,2cm
- Delivery includes adjustable wall bracket
- Can be used indoors and outdoors
- Suitable for use with all DIGITUS® Wireless LAN products

DN-70102 Patchantenna, 10dBi

DIGITUS® Magnetic stand for using with Wireless LAN antenna

- Cable length 0,75m
- Connecting plug: SMA socket reversed
- High power magnet
- Antenna stand: SMA male
- Antenna stand: diameter 43mm / height: 48mm

DN-70101 Magnetic Antenna Stand

DIGITUS® Antenna stand for using with Wireless LAN rod antennas

- Antenna stand for using with Wireless LAN rod antennas
- SMA connectors
- Compatible to all common Wireless LAN devices
- Suitable for 2,4GHz Wireless LAN - IEEE 802.11 b / g and all DIGITUS® Wireless LAN products
- Connection cable length 0,75m

DN-70106 Antenna Stand

DIGITUS® Wireless LAN Sektorantenna

- Frequenzy Range: 2,4 – 2,4835 GHz
- Impedance: 500 ± 50
- Gain: 12dBi
- Radiation: Directional
- Polarization: Vertical
- Weight: 300g ± 20g
- Connector Type: SMA male RS
- Cable Type: RG-316
- Cable length: 1m
- Dimension: (LxWxH) 233 x 110 x 50mm
- Color: grey
- Suitable for use with all DIGITUS® Wireless LAN products

DN-70103 Sectorantenna, 12dBi

DIGITUS® Wireless LAN Broadband with USB 1.1 Printer Port

- IEEE 802.11b, IEEE 802.11g, IEEE 802.3 and IEEE 802.3u compatible
- Wi-Fi compliant
- Supported Wireless LAN data rates 108,96,72,54,48,36,22,11,5.5,2.0,1.0 Mbps
- 128 Bit WEP (wired equivalent privacy) encryption
- Wireless fidelity protected access (WPA)
- Atheros-Chipset
- Broadband routing and IP sharing via xDSL or cable modem
- Comprehensive SPI Anti-DoS Firewall
- NAT/NAPT IP Sharing
- DHCP Server, VPN Pass Through
- Support UPnP, DDNS, Firmware Upgrade
- 1 x RJ 45 WAN, 4 x RJ 45 (LAN)
- Detachable Antenna
- Suitable for all current network environment

DN-11004-O Internet Broadband Router with USB Printer Port

DIGITUS® ADSL2+ Modem Router with 4Port N-Way Switch

- Integrated Modem für Annex B standard ITU-T G.992.3 G.992.4 G.922.5 (ADSL2 / ADSL2+)
- Downstream up to 24 Mbps and Upstream up to 2Mbps
- Compatible to ADSL
- Supported protocolls: TCP/IP, PPPoE, PPPoA
- Functions: NAT, DHCP Server, DDNS, DMZ, Port forewarding
- LED indicator for: ADSLs+ activity, switching hub and Power LED
- Broadband routing and IP sharing via xDSL or cable modem
- Comprehensive NAT / SPI firewall
- 1 x RJ 45 WAN, 1 x RJ11 (ADSL)

DN-11008 ADSL2+ Broadband Modem Router

DIGITUS® Fast Ethernet Centronics Printer Server

- 1 x CENT 36 printer port, 1x 10/100Mbps auto-sensing LAN port
- 2MB SD RAM, 512KB Flash ROM
- Supports TCP/IP,SMB over NBT and MAC IP Printing protocols
- Supports LPR printing
- Support for: Windows 95/98/ME/NT/2000/XP, Novell Netware 5.x (NDPS LPR Remote Printing (TCP/IP)) Unix / Linux and MAC OS X (IP printing)

DN-13001-V Print Server, 1-Port

DIGITUS® Fast Ethernet USB Print Server

- 1 x USB printer port
- 1x 10/100Mbps auto-sensing LAN port
- 2MB SD RAM, 512KB Flash ROM
- Supports TCP/IP,SMB over NBT and MAC IP Printing protocols
- Supports LPR printing
- Compatible with the following OS: Windows 95/98/ME/NT/2000/XP, Novell Netware 5.x (NDPS LPR Remote Printing (TCP/IP)) Unix / Linux and MAC OS X (IP printing)

DN-13003-V Print Server, 1-Port, USB

Multifunctionsserver / Printserver / Digital Media LAN Center

DIGITUS® Multifunctionserver with USB 2.0 Interface

NEW!

- Share USB 2.0 Hi Speed Devices on the network
- Provide 2 USB 2.0 Hi Speed host ports
- Share Printers, Storage Devices and Scanner on the Network
- Share USB Harddisk (FAT 16 and FAT 32), flashdrive and Cardreader
- Support SMB/CIFS and FTP file server with user level security
- LAN: 10/100 Mbps
- SDRAM 8Mbytes / Flash 2Mbytes
- CPU: ARM 9 / 166MHz
- Provide Windows Tool for Windows 98SE/ME/2000/2003/XP
- Support Easy Setup through Web Browser
- Dimension: (LxWxH) 100 x 70 x 26mm

DN-13007 USB Multifunctionsserver

DIGITUS® Wireless LAN Multifunctionserver with USB 2.0 Interface, IEEE 802.11g

- Share USB 2.0 Hi Speed Devices on the network
- Provide 2 USB 2.0 Hi Speed host ports
- Share Printers, Storage Devices and Scanner on the Network
- Share USB Harddisk (FAT 16 and FAT 32), flashdrive and Cardreader
- Support SMB/CIFS and FTP file server with user level security
- LAN: 10/100 Mbps
- Wireless LAN IEEE 802.11g, 54Mbps
- SDRAM 8Mbytes / Flash 2Mbytes
- CPU: ARM 9 / 166MHz
- Provide Windows Tool for Windows 98SE/ME/2000/2003/XP
- Support Easy Setup through Web Browser
- Dimension: (LxWxH) 100 x 70 x 26mm

DN-13015 Wireless LAN USB Multifunctionsserver

DIGITUS® 3-Port Fast Ethernet Print Server

- 2 x USB printer ports
- 1 x DSUB 25 printer port
- 1x 10/100Mbps auto-sensing LAN port
- Supports TCP/IP, NetBEUI and Appletalk network protocols
- Supports TCP/IP Protocols : BOOTP, SNMP, Telnet, TFTP, FTP, LPD, DHCP, IPP
- Compatible with the following OS: Windows 95/98/ME/NT/2000/XP, Novell Netware (3.x and up), Unix / Linux and MAC OS (Appletalk)

DN-13006-V Printserver, USB, 2 x USB, 1x parallel

DIGITUS® Wireless LAN Printserver with USB 2.0 Interface

NEW!

- Share printers with a USB port to all PCs through wired or wireless Network
- Comply with IEEE 802.3, IEEE 802.3u wired Ethernet and IEEE 802.11g/b Wireless LAN standards
- Support 10/100Mbps speed in wired networks and up to 54Mbps data rate in Wireless LAN network
- Provides one USB 2.0 port to connect to printer
- Supports TCP/IP, IPX/SPX, NetBEUI and AppleTalk network protocols and LPR, IPP, SMB/TCP, Raw Printing and Unix Logical printing protocols
- Supports peer-to-peer printing (TCP/IP/IPX/NetBEUI/AppleTalk) and server-based printing (Novell NetWare and Windows).

DN-13014 Wireless LAN Print Server, USB

DIGITUS® Wireless LAN Printserver with Centronics Interface

NEW!

- Share printers with a Centronics port to all PCs through wired or wireless Network.
- Comply with IEEE 802.3, IEEE 802.3u wired Ethernet and IEEE 802.11g/b Wireless LAN standards
- Support 10/100Mbps speed in wired networks and up to 54Mbps data rate in Wireless LAN network
- Provides one Centronics port to connect to the printer
- Supports TCP/IP, IPX/SPX, NetBEUI and AppleTalk network protocols and LPR, IPP, SMB/TCP, Raw Printing and Unix Logical printing protocols
- Supports peer-to-peer printing (TCP/IP/IPX/NetBEUI/AppleTalk) and server-based printing (Novell NetWare and Windows).
- Compatible with all major operating systems (Windows 95/98SE/Me/NT/2000/XP/2003, NetWare (3.x above), MAC OS and Unix/Linux)

DN-13016 Wireless LAN Print Server, Centronics

DIGITUS® Wireless Digital Media LAN Center, 802.11g

- Compatible with IEE 802.11b/g standard
- Plays audio, video and image files
- Setup via the TV screen
- Operate via infrared remote control
- Supports UPnP and AV auto-discover
- Supports UPnP AV control point software which controls access to all media files
- Enables simultaneous access to a media server and other devices that provide digital media.
- Device management via a WEB interface
- Supports DHCP client and DNS client
- Audio formats MP3, MP1, MP2, AIF, WAV, WMA
- Video formats: MPEG-1, MPEG-2, MPEG-4(ISO), DIVX(4/5)
- Photo formats: JPEG, PNG, BMP, GIF, TIF
- Playlists: m3u. pls

DN-7014 Wireless LAN Digital Media Center

DIGITUS® 10/100 Mbit Fast Ethernet PCI Network Card

- Realtek Chipset
- IEEE 802.3 and IEEE 802.3u compatible
- 20 / 200 Mbit full duplex
- PCI Local Bus Rev.2.1 and 2.2 compatible
- Suitable for all typical network environments

DN-1001E Fast Ethernet PCI Network Card

DIGITUS® 10/100 Mbit Fast Ethernet Cardbus

- IEEE 802.3 and IEEE 802.3u compatible
- 32 Bit PC-Card compatible
- 20 / 200 Mbit in full duplex
- PCI Local Bus Rev.2.1 and 2.2 compatible
- Suitable for all typical network environments
- Support: Windows 98/98SE/ME/2000/XP

DN-2002C Fast Ethernet Cardbus Adapter

DIGITUS® Fast Ethernet N-Way 5 Port Desktop Switch

- IEEE 802.3 and IEEE 802.3u compatible
- 20/200 MBit full duplex
- Automatic speed and half/full duplex detection / configuration
- Store and forward architecture
- Auto MDI / MDI-X function
- External power supply

DN-5001C N-Way Switch, 5-Port

DIGITUS® Fast Ethernet N-Way 8-Port Desktop Switch

- IEEE 802.3 and IEEE 802.3u compatible
- 20/200 MBit full duplex
- Automatic speed and half/full duplex detection / configuration
- Store and forward architecture
- Auto MDI / MDI-X function
- CE compliant
- External power supply

DN-5002C N-Way Switch, 8-Port

DIGITUS® Fast Ethernet Desktop N-Way 16-Port Desktop Switch

- IEEE 802.3 and IEEE 802.3u compatible
- 20/200 MBit full duplex
- Automatic speed and half/full duplex detection / configuration
- Store and forward architecture
- Auto MDI / MDI-X function
- External power supply

DN-5003D N-Way Switch, 16-Port

DIGITUS® Fast Ethernet N-Way Switch, 16- and 24-Port, 19“

- IEEE 802.3 and IEEE 802.3u compatible
- 20/200 MBit full duplex
- Automatic speed and half/full duplex detection / configuration
- Store and forward architecture
- Auto MDI / MDI-X function
- External power supply

DN-6001D N-Way Switch, 16-Port
DN-6002C N-Way Switch, 24-Port

DIGITUS® 10/100 Mbps Ethernet USB 1.1 Adapter

- Ethernet IEEE 802.3 10BaseT compatible, USB 1.1 full speed (up to 12 Mbps)
- 1 x RJ-45 (STP) port, USB female type A
- Plug & Play
- Power supply via USB bus
- Suitable for all typical network environments

DN-3015 Ethernet to USB Adapter

DIGITUS® 10/100 Mbps Ethernet USB 2.0 Adapter

- Ethernet IEEE 802.3 10BaseT compatible, USB 1.1 full speed (up to 12 Mbps)
- 1 x RJ-45 (STP) port, USB female type A
- Plug & Play
- Power supply via USB bus
- Suitable for all typical network environments

DN-3016 Ethernet to USB 2.0 Adapter

DIGITUS® Netlink Adapter USB 2.0

- Peer to Peer connection (up to 16 PC)
- Max. Transferrate: 100 Mbps
- Supported protocol: TCP-IP, NetBEUI and IPX/SPX

DN-3004-1 USB Netlink Adapter

DIGITUS® Gigabit PCI Network Card, 32 Bit

- Realtek Chipset
- PCI Local Bus Master Rev.2.1 and 2.2 compatible
- IEEE 802.3, IEEE 802.3u, IEEE 802.3z and IEEE 802.3x compatible
- 20 / 200 / 2000 Mbit full duplex
- IEEE 802.3x full-duplex Flowcontrol
- Support Wake On LAN function and IEEE 802.1Q VLAN tagging
- Suitable for all typical network environments

DN-1011 Gigabit PCI Network Card

DIGITUS® Gigabit Network Cardbus, 32 Bit

- Realtek Chipset
- IEEE 802.3, IEEE 802.3u, IEEE 802.3z and IEEE 802.3x compatible
- 20 / 200 / 2000 Mbit full duplex
- 32 bit PC card compatible
- Suitable for all current network environments
- Support: Windows 98/98SE/ME/2000/XP

DN-2004 Gigabit Cardbus Adapter

DIGITUS® Gigabit Desktop N-Way 5 Port Switch

- IEEE802.3 Ethernet, IEEE802.3u Fast Ethernet, IEEE802.3ab Gigabit Ethernet compatible
- Half / full duplex operation at 10/100 Mbps, full duplex at 1000 Mbps
- Automatic speed and half / full duplex recognition / adjustment
- 20 / 200 / 2000 Mbit in full duplex mode
- Auto MDI / MDI-X function
- 8K MAC addresses, 256Kbyte cache
- External power supply

DN-8007C1 Gigabit Switch, 5-Port

DIGITUS® Gigabit Desktop N-Way 8 Port Switch

- IEEE802.3 Ethernet, IEEE802.3u Fast Ethernet, IEEE802.3ab Gigabit Ethernet compatible
- Half / full duplex operation at 10/100 Mbps, full duplex at 1000 Mbps
- Automatic speed and half / full duplex recognition / adjustment
- 20 / 200 / 2000 Mbit in full duplex mode
- Auto MDI / MDI-X function
- 8K MAC addresses, 144Kbyte cache
- External power supply

DN-8006C1 Gigabit Switch, 8-Port

DIGITUS® Gigabit 16-Port N-Way Switch, with 2 SFP Ports

- IEEE802.3, IEEE802.3u, IEEE802.3z and IEEE 802.3x compatible
- Half / full Duplex operation at 10/100 Mbps, Full Duplex at 1000 Mbps
- Automatic speed and half/full duplex detection / configuration
- Auto MDI / MDI-X function
- 2 SFP Ports for fiber modul
- 8K MAC adresses, 272Kbyte cache
- Suitable for all typical network environments
- Built-in switched power supply

DN-8008-SFP Gigabit Switch, 16-Port

DIGITUS® Gigabit 24-Port N-Way Switch, with 2 SFP Ports

- IEEE802.3, IEEE802.3u, IEEE802.3z and IEEE 802.3x compatible
- Half / full Duplex operation at 10/100 Mbps, Full Duplex at 1000 Mbps
- Automatic speed and half/full duplex detection / configuration
- Auto MDI / MDI-X function
- 2 SFP Ports for fiber modul
- 8K MAC adresses, 272Kbyte cache
- Suitable for all typical network environments
- Built-in switched power supply

DN-8009-SFP Gigabit Switch, 24-Port

DIGITUS® Gigabit 16 Port Web Smart N-Way Switch with 2 SFP-Ports

- IEEE802.3, IEEE802.3u, IEEE802.3z and IEEE 802.3x compatible
- Automatic speed and half/full duplex detection / configuration
- Auto MDI / MDI-X function
- 8K MAC adresses, 400KB on chip frame buffer
- Qos support layer 4 classification
- Port Mirroring
- VLAN for Performance & Security
- Port Trunk for Bandwidth Aggregation
- 2 SFP Ports for fiber module
- Build-in Web-base management
- Built-in switched power supply

DN-8021 Gigabit Switch, 16-Port, manageable

DIGITUS® 24 Port manageable Web Smart N-Way Switch with 2 SFP-Ports

- IEEE802.3, IEEE802.3u, IEEE802.3z and IEEE 802.3x compatible
- Automatic speed and half/full duplex detection / configuration
- Auto MDI / MDI-X function
- 8K MAC adresses, 400KB on chip frame buffer
- Qos support layer 4 classification
- Port Mirroring
- VLAN for Performance & Security
- Port Trunk for Bandwidth Aggregation
- 2 Dual Media Ports (SFP) for Flexible Fiber connection
- Build-in Web-base management
- Built-in switched power supply

DN-8022 Gigabit Switch, 24-Port, manageable

DIGITUS® SFP Fiberoptic Transceiver Modul

- compliant with IEEE 802.3z Gigabit Ethernet Standard
- class 1 Laser produkt compliant with EN 60825-1
- Differential LVPECL input and output
- Duplex LC connector
- Hot pluggable
- TTL Signal detect indicator

DN-8100 MM/LC 850nm
DN-8101 SM/LC 1310nm/10km
DN-8102 SM/LC 1550nm/30km
DN-8103 BiDi SM/LC 1550nm/20km
DN-8104 BiDi SM/LC 1310nm/20km

DIGITUS® MPEG4 Internet / Network camera, Pan and Tilt

- Built-in high performance CPU and MPEG4 encoder chip
- Audio and video transmission
- Access via web browser with Active X support
- Pan and Tilt function, supported by Internet Explorer

Specifications:
- Aperture: F=1.8, Focal length: 6.0mm
- Minimum ambient light 0.5 lux
- Sensor: 1/3" Color CMOS Sensor
- Automatic colour control, exposure and white balance
- Adjustable resolutions: 160 x 112, 320 x 240 and 640 x 480
- Pan: from -170° to 170° (340°), Tilt: from -90° to 45° (135°)
- Network: 1 x RJ 45 (network connection)
- Web browser (at least Internet Explorer 5.01)
- For IP-view use at least Windows 98 SE / ME / 2000 or XP

DN-16030 MPEG4 Network Camera, pan and tilt
DN-16031 MPEG4 Wireless LAN Network Camera, pan and tilt

DIGITUS® Internet / Network Camera

- Direct connection with the network (IEEE 802.3 and IEEE 802.3u) by network cable
- Integration with own IP address or automatically via DHCP
- Built-in high performance CPU
- Access via web browser with Java support
- Transmission of picture and Audio over the LAN
- Transfer rate: 3 - 30 frames per second
- Integrated microphone
- Web browser with Java support (at least Internet Explorer 5.01 or Netscape 6.0)
- For IP-view use at least Windows 98/98 SE/ME/ 2000 or XP

DN-16004 Network Camera
DN-16005 Wireless LAN Network Camera

DIGITUS® MPEG4 Internet / Network Camera

- Integration with own IP address or automatically via DHCP
- Built-in high performance CPU and MPEG4 encoder chip
- Audio- and video transmission
- Access via web browser with Active X support
- Sensor: 1/3" Color CMOS Sensor
- Transfer rate: up to 30 frames per second
- Integrated microphone, sensitivity: 62dB
- Web browser (at least Internet Explorer 5.01)
- For IP-view use at least Windows 98 SE / ME / 2000 or XP

DN-16021 MPEG4 Wireless Network Camera
DN-16022 MPEG4 Wireless LAN Network Camera

DIGITUS® Internet / Network Camera

- Max. Resolution: 640 x 480 pixel
- Sensor: ¼" Color CMOS sensor with 300.000 Pixel
- Frame rate : up to 30 Frames per Second
- Communication protocol: HTTP, SMTP, NTP,DNS,TCP/IP, DHCP,UpnP
- Power Supply: DC 7,5V 0.5A, switching type power supply
- Internet Explorer 5.0 or above Netscape 6.0 or above (JAVA Mode)
- OS supported Microsoft Windows 98 SE/ME/NT 4.0/2000/XP/2003

DN-16003 Network Camera

DIGITUS® High Speed Powerline Ethernet Bridge

NEW!

- Powerline High Speed Ethernet Bridge with Ethernet connection (RJ-45) for shared Internet access via DSL modem over the existing indoor power network
- Data transmission rates of up to 85 Mbit/s over the building's own power network
- Downward compatible to DIGITUS® 14 Mbit/s Powerline Adapter
- Range of up to 150 meters through rooms and across floors
- Eavesdropping security through integrated encryption process
- Particularly compact shape - no larger than a plug-in power adapter
- Supports the operating systems Microsoft Windows 98SE, ME, 2000 or XP

DN-15012 High Speed Powerline Ethernet Bridge

DIGITUS® Powerline Ethernet Bridge

- Powerline Ethernet Bridge with Ethernet connection (RJ-45) for shared Internet access via DSL modem over the existing indoor power network
- Data transmission rates of up to 14 Mbit/s over the building's own power network
- Range of up to 150 meters through rooms and across floors
- Eavesdropping security through integrated encryption process
- Particularly compact shape - no larger than a plug-in power adapter
- Supports the operating systems Microsoft Windows 98SE, ME, 2000 or XP
- CE conformity

DN-15002 Powerline Ethernet Bridge

DIGITUS® Powerline Ethernet Bridge Connection Set

- Two Powerline Ethernet bridges with Ethernet connection (RJ-45) for shared Internet access via DSL modem over the existing indoor power network
- Networking of multiple computers over the existing indoor power network
- Internet access with X-Box and Play Station 2
- Data transmission rates of up to 14 Mbit/s over the building's own power network
- Range of up to 150 meters through rooms and across floors
- Eavesdropping security through integrated encryption process
- Supports the operating systems Microsoft Windows 98SE, ME, 2000 or XP
- Set consisting of 2 Ethernet Powerline Adapters, including drivers and manual

DN-15003 Powerline Ethernet Bridge Set

DIGITUS® PC ATX Power Supply Tester

- ATX Power Supply Tester
- Shows the accurate status of all Power Supply voltages
- Fast and easy Plug & Play operation
- Connectors for testing with 20 / 24 pin Mainboard connectors, 4, 6 and 8 pin extension connectors as well Floppy and SATA connectors
- Robust aluminium housing
- Essential for service personnel and computer enthusiasts

DA-70600 ATX Power Supply Tester with LED

DIGITUS® Patch Cable, FTP, CAT 5E

- Foil shielded CAT 5e patch cable
- 4 x 2 AWG 26/7, TwistedPair, 100 Ohm, 2 x RJ45 Pin Male
- Boot with kink protection and strain relief

DB-800316	1m
DB-800415	3m
DB-800460	5m
DB-800569	10m
DB-082651	20m
DB-082668	30m
DB-066583	Modular Coupling 2x RJ45 female

DIGITUS® PC ATX Power Supply Tester with LCD

- ATX Power Supply Tester
- Shows the accurate status of all Power Supply voltages
- Fast and easy Plug & Play operation
- Connectors for testing with 20 / 24 pin Mainboard connectors, 4, 6 and 8 pin extension connectors as well Floppy and SATA connectors
- Robust aluminium housing
- Essential for service personnel and computer enthusiasts

DA-70601 ATX Power Supply Tester with LCD

DIGITUS® 4-Port USB 2.0 Mini-Hub

- USB 2.0 and USB 1.1 compatible
- 4 x USB A, female (USB 1.1 and 2.0 devices)
- Maximum data transfer rate 480 Mbps (USB 2.0)
- Over current protection on all outputs
- "Hot-plug" and "PnP" compatible
- Power supply via USB
- Additional USB cable included
- Operating system support for Windows XP and MAC OS 10.x and higher

DA-70132 USB 2.0 Hub, 4-Port

DIGITUS® 4-Port USB 2.0 Hub, ALU Housing

- Aluminium Design housing
- Compliant with USB specification 2.0
- 4 Port Hub (OHCI / EHCI)
- Compact pocket size
- Maximum data transfer rate 480 Mbps (USB 2.0)
- Supports Plug & Play and Hot Swap
- Equipped with overcurrent detection and protection
- LED status indicators
- USB cable included
- Supported OS: Win98/98SE/ME/2000/XP, MAC OS 8.6 and higher

DA-70212 USB 2.0 Hub, 4-Port

DIGITUS® 3.5"Multifunktion-Panel

- 3.5" installation size, incl. 5.25" installation frame
- 2 x USB 2.0 / USB 1.1 ports
- IEEE 1394 ports: 1 x IEEE 1394 female 6-pin
- 1 x audio line in, line out and microphone
- USB, Firewire and audio connector cables included
- System requirements: Min. Win 98SE/2000/XP Computer with installed 2 x USB 2.0 / USB 1.1 1x "Firewire" and audio interfaces

DA-70122 3.5" Multifunction-Panel

DIGITUS® 4-Port USB 2.0 Mini Hub

- USB 2.0 and USB 1.1 compatible
- 4 x USB A, female (USB 1.1 and 2.0 devices)
- Maximum data transfer rate 480 Mbps (USB 2.0)
- Over current protection on all outputs
- "Hot-plug" and "PnP" compatible
- Additional USB cable and external power supply included
- Operating system support for Windows XP and MAC OS 10.x and higher

DA-70114/MINI USB 2.0 Mini Hub, 4-Port

DIGITUS® 4-Port, 7-Port USB 2.0 Hub

- USB 2.0 and USB 1.1 compatible.
- 4 x USB A socket (USB 1.1 and 2.0 devices)
- Maximum data transfer rate 480 Mbps (USB 2.0)
- Voltage protection at all outputs
- Supports „hot-plug", is „PnP" capable
- Compatible with PC and Apple computers (G3 and G4 series)
- Support for following OS: Windows 98SE / 2000 / XP and Mac OS X.x and better
- Includes USB connector cable and power supply

DA-70114-1 USB 2.0 Hub, 4-Port
DA-70131-1 USB 2.0 Hub, 7-Port

DIGITUS® 5,25" Multimedia Panel USB 2.0, 24in1 Card Reader

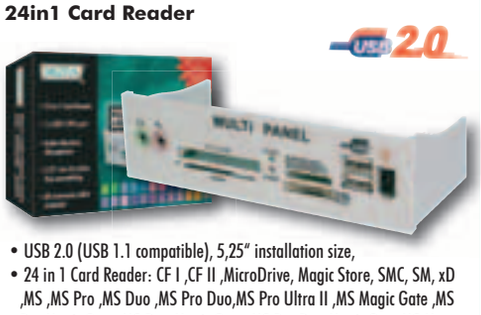

- USB 2.0 (USB 1.1 compatible), 5,25" installation size,
- 24 in 1 Card Reader: CF I ,CF II ,MicroDrive, Magic Store, SMC, SM, xD ,MS ,MS Pro ,MS Duo ,MS Pro Duo,MS Pro Ultra II ,MS Magic Gate ,MS Pro Magic Gate ,MS Duo Magic Gate ,MS Pro Duo Magic Gate,MS Memory Selection Function, MS Rom, SD, MMC 3.0, MMC 4.0, RS-MMC 3.0, RS-MMC 4.0, Mini-SD
- Connectors: 2x USB2.0, 1x „Firewire" IEEE 1394a Connector, 1x Earphone jack, 1x Microfon jack
- All necessary cable included
- Operating System: Win 98SE/2000/XP

DA-70138-1 Multimedia-Panel, beige
DA-70138B-1 Multimedia-Panel, black
DA-70138S-1 Multimedia-Panel, silver

DIGITUS® USB 2.0 Hub 4-Port Illuminated

- Compliant with USB specification 2.0
- Root Hub with 4 downstream facing ports which are shared by OHCI and EHCI host controller core
- Maximum data transfer rate 480 Mbps (USB 2.0)
- Supports Plug & Play and Hot Swap
- Equipped with overcurrent detection and protection
- LED status indicators, LED color: blue
- USB connection cable included
- Inclusiv external power supply for DA-70211

DA-70210 USB 2.0 Hub, 4-Port iluminated
DA-70211 USB 2.0 Hub, 4-Port iluminated, incl. Power Supply

DIGITUS® 4-Port USB 2.0 Hub, Front-Panel

- USB 2.0 and USB 1.1 compatible
- 4 x USB A, female (USB 1.1 and 2.0 devices)
- Maximum data transfer rate 480 Mbps (USB 2.0)
- Over current protection on all outputs
- "Hot-plug" and "PnP" compatible
- Power supply via PC power supply
- Additional USB cable included
- Operating system support for Windows XP and MAC OS 10.x and higher

DA-70133 USB 2.0 Hub, 4 Port, Front-Panel

DIGITUS® 5,25" Multimedia Panel, USB 2.0, 24in1 Card Reader

- USB 2.0 (USB 1.1 compatible)
- 5,25" installation size
- 24 in 1 Card Reader: CF I ,CF II ,MicroDrive, Magic Store, SMC, SM, xD ,MS ,MS Pro ,MS Duo ,MS Pro Duo,MS Pro Ultra II ,MS Magic Gate ,MS Pro Magic Gate ,MS Duo Magic Gate ,MS Pro Duo Magic Gate,MS Memory Selection Function, MS Rom, SD, MMC 3.0, MMC 4.0, RS-MMC 3.0, RS-MMC 4.0, Mini-SD
- Connectors: 2x USB2.0, 1x „Firewire" IEEE 1394a connector, 1x Video IN (Cinch), 1x Video OUT (Cinch), 1x Earphone jack, 1x Microfon jack, 1x Line IN,1x Seriell / RS 232, 2x PS/2 (Mouse, Keyboard)
- All necessary cable included
- Operating System: Win 98SE/2000/XP

DA-70137-2 Multimedia-Panel, beige

DIGITUS® SIM Card Reader

NEW!

- SIM phone book back up, restore and editing
- incl.English, German, French, Italian Software
- SMS data management
- Outlook / Lotus Notes synchronized
- Compatible with all SIM's from any manufacturers operators (native, Java, etc.)
- Compliant with GSM 11.11 standards
- Supported OS: Win 98SE / ME / 2000 / XP, Internet Explorer v. 5.5 or later

DA-70320 USB SIM Card Reader

DIGITUS® Cardbus CompactFlash Card Reader

- Fulfils the 16-bit PCMCIA specification
- 32-bit PC card compatible
- for Compact Flash Type I

DC PCMCIA-CR-CF Cardbus CF Adapter

DIGITUS® 23in1 Cardbus Card Reader

- Fulfils the 16-bit PCMCIA specification
- 32-bit PC card compatible
- 4IN1 for SM, MS, SD and MMC memory media

DC PCMCIA-CR-23IN1 Cardbus Card Reader

DIGITUS® Multiformat Card Reader USB 2.0, 24in1, internal / external, 3,5"

- Compliant to USB 2.0 specification, Internal/external use 3.5"
- Supports Media Copy and Hot-Swap and Hot-Plug, PnP
- Media: CF I , CF II , MicroDrive , Magic Store , SMC , SM , xD , MS , MS Pro , MS Duo , MS Pro Duo , MS Pro Ultra II , MS Magic Gate , MS Pro Magic Gate , MS Duo Magic Gate , MS, Pro Duo Magic Gate , MS Memory Selection Function, MS Rom , SD , MMC 3.0 , MMC 4.0 , RS-MMC 3.0 , RS-MMC 4.0 , Mini-SD
- USB connection cable integrated
- Supported OS: WIN XP, Mac OS 10.x

DA-70305-3 Card Reader intern / extern

DIGITUS® USB 2.0 Extension Cable, A to A

- Double shielded
- Cable UL2725, 2 x AWG24, 2 x AWG28
- USB 2.0 compatible and certified

DB-130260 2m
DB-130277 3m
DB-130284 5m

DIGITUS® Card Reader USB 2.0 24in1 + HUB

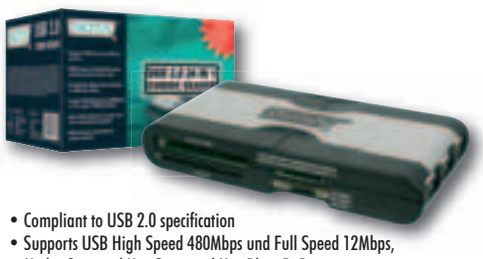

- Compliant to USB 2.0 specification
- Supports USB High Speed 480Mbps und Full Speed 12Mbps, Media Copy und Hot-Swap and Hot-Plug, PnP
- Media: CF I, CF II , MicroDrive, MagicStore, SMC, SM, xD, MS, MS Pro, MS Duo, MS Pro Duo, MS Pro Ultra II, MS Magic Gate, MS Pro Magic Gate, MS DuoMagic Gate, MS Pro Duo Magic Gate, MS Memory Selection Function, MS Rom, SD , MMC 3.0, MMC 4.0, RS-MMC 3.0,RS-MMC 4.0, Mini-SD
- Integrated 3-Port HUB
- USB connection cable and power supply incl.
- Supported OS: WIN 98SE/ ME/ 2000/ XP, Mac OS 10.x

DA-70311-3 Multiformat Card Reader 24in1, USB Hub

DIGITUS® Multiformat Card Reader USB 2.0, 24in1 external

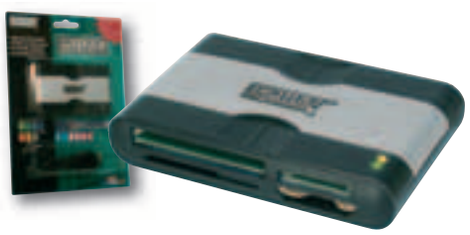

- Compliant to USB 2.0 specification
- Supports USB High Speed 480Mbps und Full Speed 12Mbps, Media Copy , Hot-Swap and Hot-Plug, PnP
- Media: CF I, CF II , MicroDrive, MagicStore, SMC, SM, xD, MS, MS Pro, MS Duo, MS Pro Duo, MS Pro Ultra II, MS Magic Gate, MS Pro Magic Gate, MS DuoMagic Gate, MS Pro Duo Magic Gate, MS Memory Selection Function, MS Rom, SD , MMC 3.0, MMC 4.0, RS-MMC 3.0,RS-MMC 4.0, Mini-SD
- Bus powered
- USB connection cable incl.
- Supported OS: WIN 98SE/ ME/ 2000/ XP, Mac OS 10.x

DA-70309-3 Multiformat Card Reader 24in1

DIGITUS® Multiformat Card Reader USB 2.0, 25in1 external

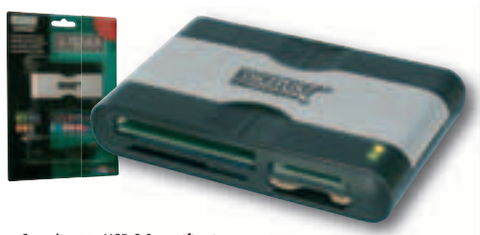

- Compliant to USB 2.0 specification
- Supports USB High Speed 480Mbps und Full Speed 12Mbps, Media Copy , Hot-Swap and Hot-Plug, PnP
- Media: CF I, CF II , MicroDrive, MagicStore, SMC, SM, xD, MS, MS Pro, MS Duo, MS Pro Duo, MS Pro Ultra II, MS Magic Gate, MS Pro Magic Gate, MS DuoMagic Gate, MS Pro Duo Magic Gate, MS Memory Selection Function, MS Rom, SD , MMC 3.0, MMC 4.0, RS-MMC 3.0,RS-MMC 4.0, Mini-SD, Trans Flash
- Bus powered
- USB connection cable incl.
- Supported OS: WIN 98SE/ ME/ 2000/ XP, Mac OS 10.x

DA-70309-4 Multiformat Card Reader 25in1

DIGITUS® Notebook Cooler Pad

- Metallcase
- powerfull, silent Fan
- 3 Port USB 2.0 Hub integrated
- 4 Slot Multicardreader with USB 2.0 Interface is integrated
- Support for: CompactFlash, Micro Drive, Memory Stick, Memory Stick pro, Secure Digital, MultiMedia Card
- Support für Windows 98/2000/XP

DA-70340 Notebook Cooler Pad

DIGITUS® External HDD Enclosure 2,5" USB 2.0/Firewire A

- Plastic case with aluminium look
- For 2.5" hard drives
- Drive operation LED at the front
- Can be opened without tools
- Integrated IDE to USB 2.0 / Firewire (IEEE 1394a) controller
- USB or Firewire connector cable included
- PS/2 power supply adapter
- PC and Mac compatible

DA-70407-1 USB 2.0
DA-70409-1 USB 2.0 & Firewire A

DIGITUS® External HDD Enclosure 3,5" USB 2.0/Firewire A

- Plastic case with aluminium look
- For 3.5" hard drives
- Drive operation LED at the front
- Can be opened without tools
- Integrated Power switch
- Integrated IDE to USB 2.0 / Firewire (IEEE 1394a) controller
- USB or Firewire connector cable included
- PS/2 power supply adapter
- PC and Mac compatible

DA-70410-2 USB 2.0
DA-70412-2 USB 2.0 & Firewire A

DIGITUS® External HDD Enclosure 5,25" USB 2.0/Firewire A

- Plastic case with aluminium look
- For CD, CD-R, CD-RW and DVD drives
- Audio out, 2 x cinch for audio left / right
- Integrated IDE to USB 2.0 / Firewire (IEEE 1394a) controller
- USB or Firewire connector cable plus power supply included
- PC and Mac compatible

DA-70413-1 USB 2.0
DA-70415-1 USB 2.0 & Firewire A

DIGITUS® External Premium Enclosure 2,5" USB 2.0/Firewire A

- External aluminium case for 2.5" hard drives
- Conforms to USB 2.0 or USB2.0 and IEEE1394a specification (DA-70502-1)
- Data transfer rate up to 480Mbps (USB) and 400bps (Firewire A)
- Two Firewire ports, 1x 6-pin und 1x 4-pin (DA-70502-1)
- Conforms to ATA/ATAPI-6 specification (Rev.1.0 for USB)
- Conforms to USB storage class specification Ver.1.0
- Compatible with Win98/SE, 2000, ME and XP
- Supports Mac OS 9.0, supports LINUX 2.4.x and higher
- LED power (green)/ status (red)
- Power supply via USB port, external power supply (optional)

DA-70501-1 USB 2.0
DA-70502-1 USB 2.0 + Firewire A

DIGITUS® External Premium Enclosure 3,5" USB 2.0/Firewire A

- External aluminium case for 3.5" drives
- Conforms to USB 2.0 or USB 1.1 and IEEE1394a specification (DA-70512-1)
- Data transfer rate up to 480Mbps (USB) and 400bps (Firewire A)
- Two Firewire ports, 1x 6-pin and 1x 4-pin (DA-70512-1)
- Conforms to ATA/ATAPI-6 specification (Rev.1.0 for USB)
- Conforms to USB storage class specification Ver.1.0
- Compatible with Win98/SE, 2000, ME and XP
- Supports Mac OS 9.0, supports LINUX 2.4.x and higher
- LED power (green)/ status (orange)
- Power via external power supply

DA-70511-1 USB 2.0
DA-70512-1 USB 2.0 + Firewire A

DIGITUS® External Premium Enclosure 5,25" USB 2.0/Firewire A

- External aluminium case for 3.5" and 5.25" drives
- Conforms to USB 2.0 or USB2.0 and IEEE1394a specification (DA-70522-1)
- Data transfer rate up to 480Mbps (USB) and 400bps (Firewire A)
- Two Firewire ports, 1x 6-pin und 1x 4-pin (DA-70522-1)
- Conforms to ATA/ATAPI-6 specification (Rev.1.0 for USB)
- Conforms to USB storage class specification Ver.1.0
- Compatible with Win98/SE, 2000, ME and XP
- Supports Mac OS 9.0, supports LINUX 2.4.x and higher
- LED power (green)/ status (orange)
- Power via external power supply

DA-70521-1 USB 2.0
DA-70522-1 USB 2.0 + Firewire A

DIGITUS® 3,5" External Premium Enclosure ALU S-ATA -> S-ATA

- Serial ATA 1.0 compliant
- Automation 3.0/1.5Gbps transmission rate negotiation
- Support S-ATA hot-plug
- Support S-ATA connecto
- Thinner and longer cable
- Serialize/ Deserialize a 40 bit (double word aligned) or 10 bit with 4X speed signal from/to the link layer
- Provide specified OOB signal detection and transmission
- 32 bits CRC error checking on all data and control information
- Supports 32 bits and 48 bits LBA hard disk
- Compatible with WIN98, WIN98 se, WIN 2000, WIN ME and WIN XP
- Support MAC OS which support S-ATA HDD
- Support LINUX OS which support S-ATA HDD

DA-70513-1 S-ATA to S-ATA
DA-70514-1 S-ATA to S-ATA/USB 2.0

DIGITUS® 3,5" External Enclosure S-ATA

- Plastic housing with aluminiumdesign
- Interface standard: Serial ATA
- Data transfer up to 1.5 Gbps (150MB/sec.)
- Power switch On/Off
- Ideal for backup, storage Data files
- Power LED indicator
- Power Supply: 12V Power Adapter

DA-70440 S-ATA to S-ATA

DIGITUS® 3.5" External Enclosure USB 2.0 ALU

- Aluminium case
- USB 2.0 and USB 1.1 compatible
- Data transfer rate up to 480Mbps
- Hot plug ´n´ play
- On / off switch
- Built-in Fan
- Supports WIN XP and MAC OS X.x and better

DA-70420 USB 2.0 with Cooler

DIGITUS® 2,5" External Enclosure USB 2.0 with Backup-Function

- Plastic housing with aluminiumdesign
- For all standard 2.5 Inch IDE Interface Hard Disk (44pin)
- Interface standard: USB Ver.2.0 / 1.1
- Support High Speed (480 Mbps) And Full Speed (12 Mbps)
- Truly Plug & Play automatic system configuration
- Ideal for backup, storage Data files
- File Comparison Windows
- File Synchronization
- File Auto Backup
- Power Supply: 5V Power Adapter only (optional)

DA-70421 USB 2.0 with Backup-Function

DIGITUS® 3,5" External Enclosure USB 2.0 with Backup-Function

- For all standard 3.5" IDE HDD
- Interface standard: USB Ver.2.0 / 1.1
- Support High Speed (480 Mbps) And Full Speed (12 Mbps)
- Truly Plug & Play automatic system configuration
- Ideal for backup, storage Data files
- Power switch On/Off
- Efficient cooling fan
- File Comparison Windows
- File Synchronization
- File Auto Backup

DA-70422 USB 2.0 with Backup-Funktion and Cooler

DIGITUS® USB 2.0 4xHDD Box

- Compliant to USB 2.0 specification, type B connector
- IDE interface, LBA compatible HDD (>1024 cyl.)
- Supports 3.5" and 2.5" HDD (2.5" with optional adapter)
- Power ON/OFF switch
- Cooling Fan ON/OFF switch with LED
- JBOD mode with LED indication
- Supported OS: Win 98SE/ ME/ 2000 SP-3/ XP > SP-1, Mac OS 10.3.9/10.4
- Dimensions: 135 mm x 172 mm x 248 mm
- Weight: 2.4 kg
- Power supply: Input 100V-240V AC, Output +5V 4.0A/ +12V 6.0A(max.)
- Temperature: 5-35° C
- Humidity: 20-80%

DA-70530 USB 2.0, 4x IDE

DIGITUS® Serial ATA Hard Drive Removable Frame

- Hard drive removable frame for installation in 5.25" PC drive bays
- For 3,5'' Serial ATA hard drives
- Material: plastic
- Lockable
- With status LED
- 1 additional fan integrated

DA-50214-A HDD removable Frame, S-ATA

DIGITUS® IDE Hard Drive Removable Frame

- Hard disk removable frame 5.25'' siutable for 3.5'' hard drives
- Material: plastic
- Frames are equipped with an additional fan (one further fan for the drawer can also be fitted
- Lockable drawer
- With status LED

DA-50211-A HDD removable Frame, ATA 133
DA-50212-A Additional drawer

DIGITUS® 2,5" HDD Mounting Kit

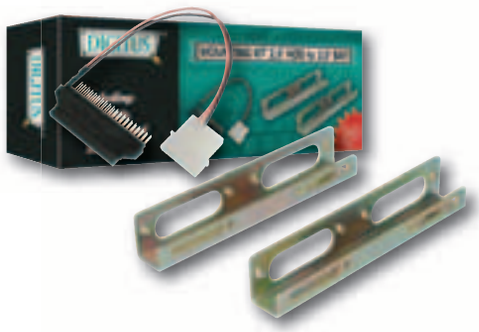

- To install 2.5" hard drives in 3.5" drive slots

Supplied:
- Two metal installation brackets including screws,
- Adapter for 40 pin IDE cable and power supply adapter

DA-70430 Mounting KIT

DIGITUS® USB to PS/2 Adapter Cable

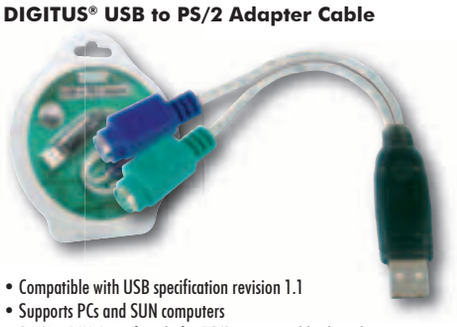

- Compatible with USB specification revision 1.1
- Supports PCs and SUN computers
- 2 x MiniDIN 6-pin female for PS/2 mouse and keyboard
- Power supply for the connected USB devices via the port
- USB Hot Plug and Play support
- USB connector cable with USB A male
- Software requirements: Win 98SE/ME/2000/XP

DA-70118 PS/2 to USB Adapter

DIGITUS® USB 2.0 to IDE Adapter Cable

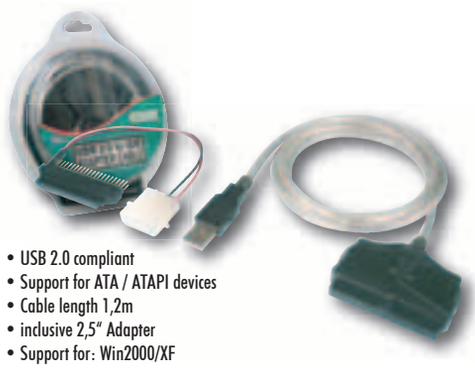

- USB 2.0 compliant
- Support for ATA / ATAPI devices
- Cable length 1,2m
- inclusive 2,5" Adapter
- Support for: Win2000/XF

DA-70147 IDE to USB 2.0 Adapter

DIGITUS® USB 2.0 IDE & SATA Cable

- Support 1,8"/2,5"/3,5" IDE and Serial ATA HardDisk
- Support SATA, SATA II, compliance with USB 2.0 (Hi-Speed)
- Compliance with USB Mass Storage Class
- Support ATA/ATAPI Ultra DMA Mode, PACKET command feature set, LBA48 bit addressing mode, dual LUN (Logic Unit Number) with automatically master/slave enumeration
- High-Speed Data Transfer, Low Power Consumption
- Red / green LED's indicating operation
- Operating System Support: Windows 98SE/ME/2000/XP/2003

DA-70148 IDE & S-ATA to USB 2.0 Adapter

DIGITUS® USB 2.0 Cable Set

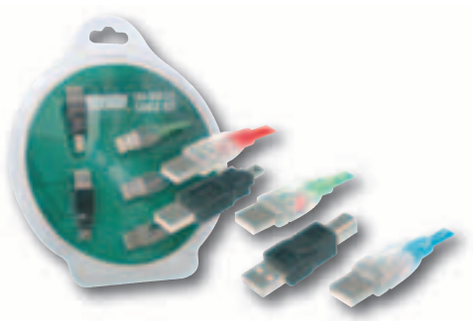

- 3 Pcs. USB Extension cable (green. blue, red)
- USB A - male to USB A - female length 1,5m
- Integrated color LED Light
- Compliant with USB 2.0 standard
- included USB Adapter A to B and USB A to Mini 5 pin

DC USB2-LED USB 2.0 Cable Set

DIGITUS® USB Detection Cable 1.1 & 2.0

- Extra bright LEDs show the USB 2.0 / USB 1.1 speed status by different colors
- Stylish design
- Also for service and maintenance
- USB connection cable, USB A male <=> USB B male

DA-70750 USB Detection Cable

DIGITUS® USB 1.1 and USB 2.0 Printer Cable

- Compatible with USB specification revision 1.1
- USB A male <=> CENT 36-pin male
- Supports EPP / ECP and bidirectional printing
- Data transfer up to 1,216 Mbps in ECP mode

DC USB-PM1 USB Printer Cable

DIGITUS® USB Sharing Switch for USB 1.1and USB 2.0

- Fulfils the USB 1.1 specification
- Use one or two USB 1.1 / 2.0 devices with two or four PCs
- Keyboard hot-key switching between the devices / PCs
- Operating system support for Win98/ME/2000/XP and MAC OS9/10.x
- No additional power supply required – power supply via USB

DA-70123	USB Sharing Switch, 2 PCs
DA-70124	USB Sharing Switch, 4 PCs

DIGITUS® USB 2.0 Repeater-Cable

- Expands the maximum permissible USB cable length by 5.0 m
- A maximum of 3 repeater cables can be combined for a total cable length of 20 m
- Compatible with USB specifi cation revision 2.0 and 1.1
- USB A male - USB A female, cable length 5 m
- Supports USB low speed (1.5 Mbps), full speed (12 Mbps) and high speed (480 Mbps)
- USB hot plug and play support
- Support for following operating systems: Win 98SE/ME/2000/XP

DA-70130-1	USB 2.0 Repeater-Cable

DIGITUS® Infrared USB 2.0 Adapter

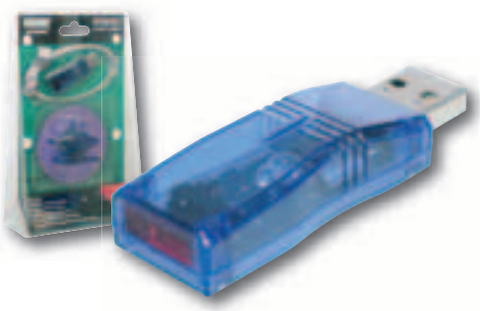

- Fast IrDA and IrDa 1.1 compatible
- Data transfer rate up to 4 Mbps
- Supplied with special plastic stand and USB connector cable

DA-70140	Infrared USB 2.0 Adapter

DIGITUS® USB 2.0 Connection Cable, A to B

- Double shielded
- Cable UL2725, 2 x AWG24, 2 x AWG28
- USB 2.0 compatible and certified

DB-117797	2m
DB-117803	3m
DB-117810	5m

DIGITUS® USB 2.0 Docking Station

- The ideally Solution for Notebooks and Subnotebooks
- USB 2.0 and USB 1.1 compatible
- Connections: 1 x DSUB 9 / Serial, 1 x DSUB 25 / Parallel, 2 x MiniDIN 6 / PS/2 Mouse and Keyboard, 2 x USB A / for another USB devices, 1 x USB B / for USB 1.1 Laplink connections, 1 x RJ 45 / Network
- Delivery inclusive power supply
- Suitable for Windows XP

DC DOCK4	USB 2.0 Notebook Docking Station

DIGITUS® USB to Serial Adapter, USB 1.1

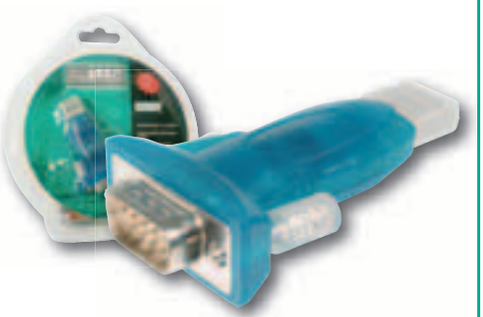

- Compliant with USB 1.1 standard
- Supports RS 232 serial interface
- Maximum data transfer rate of over 1Mbps
- Can be used for PDA and modems
- USB extension cable also supplied / approx. 80cm long
- Support for following operating systems: Windows 98/2000/XP/SE Mac OS V8.6

DA-70145	Serial to USB 1.1 USB Adapter

DIGITUS® USB Sharing Switch for USB 1.1 and USB 2.0

- Corresponds to specification USB 2.0
- Use one or two USB 1.1 / 2.0 devices with two or four PCs
- Keyboard hot-key switching between the devices / PCs
- Operating system support for Win 98/ ME/2000/XP and MAC OS9/10.x
- No additional power supply required
- Power supply via USB

DA-70135	USB Sharing Switch, 2 PCs
DA-70136	USB Sharing Switch, 2 PCs

DIGITUS® Infrared USB 1.1 Adapter

- Fast IrDA and IrDa 1.1 compatible
- Data transfer rate up to 4 Mbps
- Supplied with special USB - „Flex" connector cable

DA-70129	Infrared USB Adapter

DIGITUS® USB to Serial Adapter, USB 2.0

- Compliant with USB 2.0 standard
- Supports RS 232 serial interface
- Maximum data transfer rate of over 1Mbps
- Can be used for PDA and modems
- USB extension cable also supplied / approx. 80cm long
- Support for following operating systems: Windows 98SE/2000/XP Mac OS V8.6

DA-70146	Serial to USB 2.0 USB Adapter

DIGITUS® USB 2.0 - PCI Interface Card

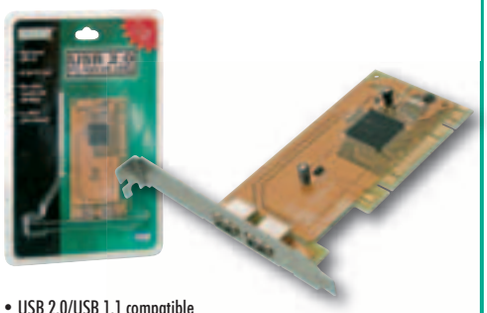

- USB 2.0/USB 1.1 compatible
- Maximum data transfer rate 480 Mbps
- Surge protection on all outputs
- Supports Hot-Plug and Plug & Play
- Compatible with PC and Apple computers (G3 and G4 series)
- The following operating systems are supported: Windows XP and MAC OS 10.x and higher.

DC USB2-2 2-Port, USB 2.0

DIGITUS® USB 2.0 PCMCIA Adapter

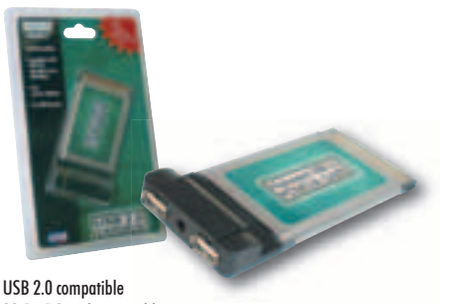

- USB 2.0 compatible
- 32-Bit PC card compatible
- 2 x USB A female
- Connection for external power supply
- Maximum data transfer rate 480 Mbps (USB 2.0)
- Surge protection on all outputs
- Supports "Hot Plugging", is "PnP" compatible
- power supply unit included

DC USB2-PCMCIA 2-Port, USB 2.0

DIGITUS® USB 2.0 & Firewire A PCI Interface Card

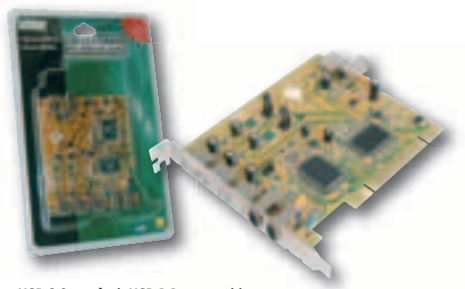

- USB 2.0 certified, USB 1.1 compatible
- IEEE1394a compatible
- Data transfer rates up to 400Mbps (IEEE) or 480Mbps (USB)
- USB 2.0 ports 3x external / 1x internal
- IEEE1394a ports 2x external / 1x internal

DCST USB2/4-1394/3V USB 2.0 + Firewire A

DIGITUS® USB 2.0 - PCI Interface Card 4+1 Port, VIA Chip

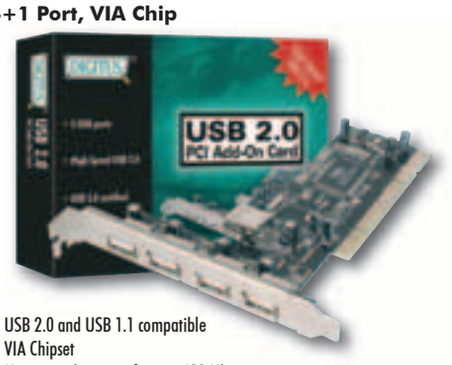

- USB 2.0 and USB 1.1 compatible
- VIA Chipset
- Maximum data transfer rate 480 Mbps
- Supports "Hot Plugging", is "PnP" capable
- Operating System: Win/98ME/SE/XP/2000

.

DC USB2-4-V 4+1-Port, USB 2.0

DIGITUS® Firewire PCI Interface Card

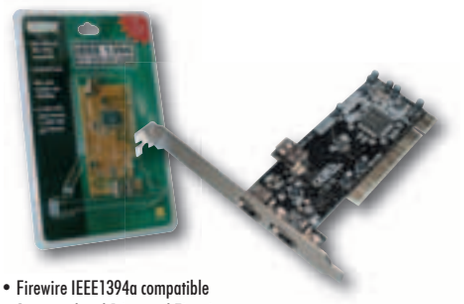

- Firewire IEEE1394a compatible
- 2 external and 1 internal Firewire port
- Data transfer rate up to 400Mbps
- Incl. cable and Ulead software (DCST 1394-2+1B)

DCST 1394-2+1 2+1 Firewire A
DCST 1394-2+1B 2+1 Firewire A + Software

DIGITUS® Firewire B (Firewire 800) PCI Interface Card

- IEEE1394a and IEEE1394b compatible
- Compatible with 32/64 bit PCI
- 3x Firewire 800 ports (9-pin)
- Additional power supply connection on the card
- Supports most devices such as camcorders, digital cameras, CD-RW/DVD-ROM, hard drives

DCST 1394B-3 Firewire B

DIGITUS® USB 2.0 - PCI Interface Card

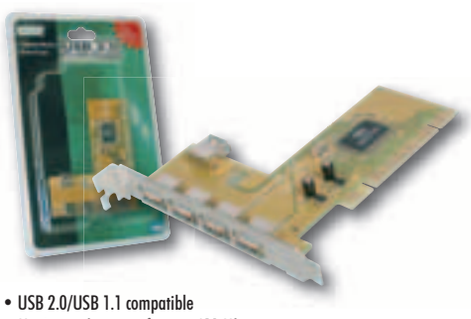

- USB 2.0/USB 1.1 compatible
- Maximum data transfer rate 480 Mbps
- Surge protection on all outputs
- Supports Hot-Plug and Plug & Play
- OS supported: Windows XP and MAC OS 10.x and higher.

DC USB2-4 4-Port, USB 2.0
DC USB2-5 4+1-Port, USB 2.0

DIGITUS® Firewire A Add-on Card PCI

- Firewire IEEE1394a compatible
- 3 external and 1 internal Firewire port
- Data transfer rate up to 400Mbps
- Incl. cable and Ulead software (DCST 1394-3+1B)

DCST 1394-3+1 3+1 Firewire A
DCST 1394-3+1B 3+1 Firewire A + Software

DIGITUS® USB 2.0/Firewire Combo Cardbus Adapter, 32 Bit

- USB 2.0, USB 1.1 and „Firewire" IEEE 1394a compatible
- Maximum data transfer rate 480 Mbps (USB 2.0) and 400 Mbps (IEEE 1394a)
- Supports „hot plug", is „PnP" capable

DCST PCMCIA-USB20FW USB 2.0 + Firewire A

DIGITUS® Firewire A Cardbus Adapter

- 3 x Firewire 6-pin ports
- IEEE 1394 / 1394a compatible
- Maximum data transfer rate 400 Mbps
- Supports "Hot Plugging", is "PnP" compatible
- Connection for external power supply
- Inclusiv Firewire 6 to 4 Pin cable
- Support Windows 98SE/ME/XP from SP1/2000.

DCST 1394-PCMCIA 3-Port, Firewire

DIGITUS® Firewire B (800) Cardbus Adapter

- IEEE 1394b / 1394a compatible
- 32-bit PC card compatible
- 1 x IEEE 1394b 9-pin connector, 1 x IEEE 1394a 6-pin connector, 1 x IEEE 1394a 4-pin connector
- Maximum data transfer rate up to 800 Mbps
- Voltage protection on all outlets
- Suports hot plug, is „PnP" capable
- Power supply included
- Support Win XP SP1/2000 SP4

DCST PCMCIA-1394B 3-Port, Firewire B

DIGITUS® ATA 133 IDE RAID Controller, PCI

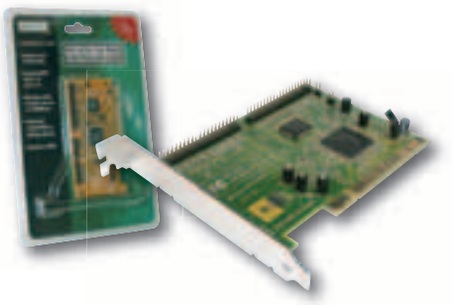

- PCI 2.1 32 Bit Adapter
- Data transmition rate up to 133 Mbps
- ATA 133, Ultra and Multiword DMA
- RAID 0, 1, 0+1
- 2 connectors for 4 IDE Hardisk drives

DCST ATA133RAID-4700 2-Port IDE

DIGITUS® Serial ATA 150 PCI Add-On Card, 2-Port

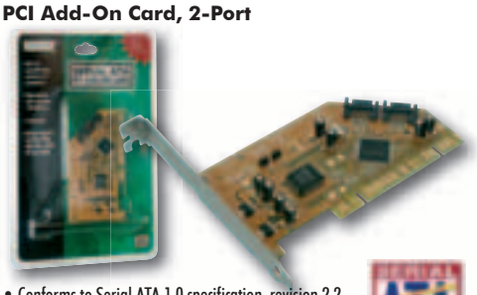

- Conforms to Serial ATA 1.0 specification, revision 2.2
- Stand-alone PCI to serial ATA host controller
- Supports hard drives larger than 137GB
- Conforms to PCI IDE Controller specification, revision 1.0
- Conforms to the programming interface for Bus Master IDE Controller, revision 1.0 standard
- Two independent serial ATA channels
- Serial ATA generation 1 data transfer rate up to 150MB/sec
- Operating system support for Win 2000 and XP
- 2 x serial ATA connections

DCST SATA150-2D 2-Port S-ATA

DIGITUS® Firewire Connection Cable, 1,8m

- IEEE 1394A compatible
- The maximum data transfer rate is 400 Mbps.

DB-051718	Firewire, 6-pin - 6-pin
DB-051725	Firewire, 6-pin - 4-pin
DB-051732	Firewire, 4-pin - 4-pin

DIGITUS® Serial Interface Card, PCI

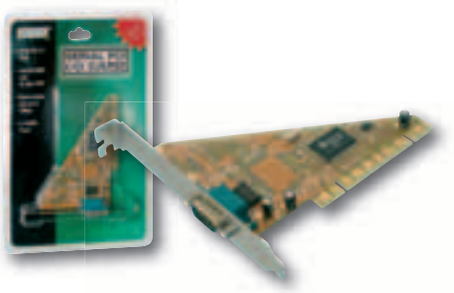

- Chipset Multi UART 16C550 with 4 independent channels
- Output 1, 2, 4 x DSUB 9
- IRQ selection takes place automatically via „PnP"
- Operating system support for DOS, Win 98/ME/2000/XP

DC SER1	1-Port, serial
DC SER2	2-Port, serial
DC SER4	4-Port, serial

DIGITUS® I/O Interface Card PCI

- Output 1 x or 2 x DSUB 25 female on slot strip
- Supports the following printer modes: SPP, EPP and ECP
- IRQ selection takes place automatically via „PnP"
- Operating system support for DOS, Win 98/ME/2000/XP

DC PAR1SER2:
2 x DSUB 9 (serial), 1 x DSUB 25 (parallel)

DC PAR1SER2 1-Port , paralell / 2-Port, seriell

DIGITUS® Parallel Interface Cards, PCI

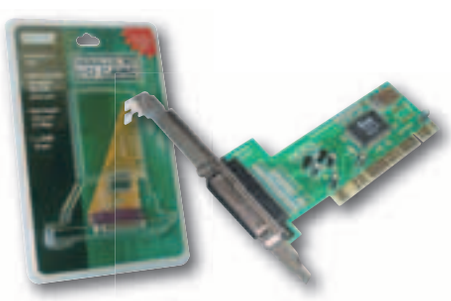

- Output 1 x or 2 x DSUB 25 female on slot strip
- Supports the following printer modes: SPP, EPP and ECP
- IRQ selection takes place automatically via „PnP"
- Operating system support for DOS, Win 98/ME/2000/XP

DC PAR1	1-Port, parallel
DC PAR2	2-Port, parallel

DIGITUS® PCMCIA to PCI Adapter-Card

- Compliant with PC Card Rel. 8.0 and PCI 2.2 Specification
- Support PCMCIA 2.1 and Cardbus PC card with 3,3V / 5V operation
- One PC card slot for (Type I/II/III PCMCIA card)

DN-7002 Cardbus to PCI Adapter-Card

DIGITUS® iPod® HotSync Cable

- Quick and easy synchronization of the iPod by plugging the cable into the USB port of the computer
- cable length 2,0m
- color: white
- fits for iPod, iPod mini, iPod shuffle, iPod Photo, iPod U

DA-70767 iPod® HotSync, USB
DA-70768 iPod® HotSync, Firewire
DA-70769 iPod® HotSync, USB and Firewire

DIGITUS® iPod® Audio Kit

- Stereo audiocable 3,5mm stereo male to 3,5mm stereo female, cable length 0,8m, gold plated contacts, retractable cable
- Stereo adapter 3,5mm stereo male to 2 x 3,5mm stereo female gold plated contacts
- Audiocable iPod system connector to 3,5mm stereo male cable length 0,8m, gold plated contacts, retractable cable
- Audiocable iPod system connector to 2x cinch male connector cable length 0,8m, gold plated contacts, retractable cable
- Inclusiv leather imitated bag dimension: 13,5 x 8,5 x 4 cm

DA-70765 iPod® Audio Kit

DIGITUS® iPod® Travel Kit

- Firewire 1394 charger for iPod/iPod mini use only
  DC power adapter 12V DC mobile outlet
  Input : DC12V output :1394-6 female DC12V Max: 800mA
  Weight: 18.4g/pcs
- iPod/iPod mini USB 2.0 data cable 0.8m retractable
  Weight: 25g/pcs
- iPod/iPod mini IEEE-1394 sync cable 0.8m retractable
  Weight: 25g/pcs
- Stereo handsfree ear type 0.8m retractable
  3.5mm stereo plug gold-plated
  Speaker: 15mm with ferrite magnet
  Frequency response: 20Hz to 20kHz
  Impedance: 32ohms
  SPL: 85dB +/- 2dB at 1mW, cm
  Weight: 23.2g/pcs
- Bag Size: 28 (l) X 15 (w) x 2 (h) cm

DA-70766 iPod® Audio Kit

DIGITUS® Portable speaker set for MP3 and iPod®

- R.M.S (THD 10%) 0.8*2W
- Driver unit: 2" * 2
- Max. output: 2 W
- Frequency response range: 200Hz-12KHz
- AC/DC adapter (not extent of delivery) or 4x AAA size batteries
- S/N ratio = -69dB
- Input sensitivity: 640mV
- Input impedance: 10K ohm
- Impedance: 4 ohm
- Product dimensions (open) WxDxH: 192 mm x 52 mm x 62 mm
- Product dimensions (folded) WxDxH: 104 mm x 62 mm x 62 mm

DA-10280 iPod® Speaker Set

DIGITUS® Portable Stereo Speaker Station for iPod®

- Power on/off switch
- AC/DC adapter (not extent of delivery) or 4x AA size batteries
- Speaker driver – 50mm full range 4ohm
- Rotary volume control
- Audio output power: 2.3W + 2.3W
- Frequency response: 200Hz – 12KHz
- Signal noise ratio: >65dB
- Distortion at 1KHz 1.3W : 0.55%
- Separation: 60dB
- Charge function for iPod and re-chargeable batteries
- Power on LED indicator
- iPod recharging LED indicator
- Product dimension (open) WxDxH: 222 mm x 62 mm x 101 mm
- Product dimension (folded) WxDxH: 222 mm x 25.6 mm x 115 mm

DA-10281 iPod® Speaker Set

DIGITUS® USB Speaker Station

- USB 1.1/2.0 compatible
- PLAY/PAUSE, SKIP NEXT,SKIP PREVIOUS keys for USB play-back
- Stereo amplifier with rotary volume control
- 2 x 50mm full-range speaker devices
- LED indicating power on, USB play-back
- Jack for connecting to auxiliary portable devices of analog output in earphone level
- USB Flash Memory: 16MB – 4GB
- File type compatible: MPEG-1.0, MPEG-2.0, MPEG-2.5 (audio layer-3)
- File system supported: FAT12
- Output power at 10% THD: 1.2W x2
- Signal noise ratio: >40dB
- Total harmonic distortion < 0.5%
- Separation: >40dB
- Frequency response: 200Hz – 12KHz
- AC Adaptor 6.5 V DC 800mA inclusive
- Works also with 4 x AA size batteries
- Product dimension WxDxH: 180 mm x 77 mm x 92 mm

DA-10282 USB Speaker Station

DIGITUS® USB 2.0 Sound Adapter

- USB 2.0 high speed sound card for the USB port
- Virtual 5.1 effects
- Integrated high performance 16bit audio converter
- Audio connection is via a 3.5mm stereo jack
- Supports Win 98SE/ME/2000/XP and Mac OS 9, OSX

DA-70770 USB 2.0 Sound Adapter

DIGITUS® USB 2.0 Extension Cable, A to A

- Double shielded
- Cable UL2725, 2 x AWG24, 2 x AWG28
- USB 2.0 compatible and certified

DB-130260 2m
DB-130277 3m
DB-130284 5m

DIGITUS® USB FM Radio

- FM Tuner 88MHz-108MHz
- Ultra-sensitive auto scan receiver
- Reset button restarts auto scan
- Line In cable (radio on sound card)
- Volume control
- LED function display

DA-70761 USB FM Radio

DIGITUS® Wireless PC Lock

- The computer automatically enters „Lock Mode", when the user is away from the computer.
- The computer automatically resumes to normal operation when the user is back to the non secure area
- Effective range: around 2 meters
- Once the computer enters the „Lock Mode" a password is required to use the computer if the transmitter / receiver pair is not available to unlock the PC
- Software driver: Support Win 98SE/ME/2000/XP

Application:
- For parents to prevent children from using PC too much time
- People who using PC/Notebook in public

DA-70755 Wireless PC Lock

DIGITUS® High Resolution Video Grabber with MPEG 4 Support

- Video input: 1 x RCA composite, 1 x S-Video.
- Video system: NTSC, PAL and SECAM multi system support
- Audio input: for WinXP, go through USB; For Win2000, go through sound card.
- Motion capture: AVI /MPEG format up to 720x480@NTSC, and 720x576@PAL resolution; MPEG 4 format @320x240 resolution.
- Still image: capture : BMP/JPG/TIF/PCX/PCT/TGA/WMF file format
- Performance: up to 25 fps at 720x576 for PAL, 30fps at 720x480 for NTSC
- Power Source: 5V DC,300mA(max) through USB port
- Video Works 6 and digital converter software included
- OS Support: Windows XP from SP1, Windows 2000 from SP 3

DA-70820 High-Res. USB 2.0 Video Grabber

DIGITUS® USB 2.0 Video Grabber

- Ideal for mobile use, compact design
- Power supply via the USB port
- Digitises video from analog sources, e.g. from VCR / sat receiver / DVD player / camcorder
- Supports PAL, NTSC and SECAM video signals
- Digitises at up to 30 frames a second at a resolution of 352 x 288 and 640 x 480 pixels
- Out: USB 2.0 and audio via stereo jack
- In: Analog S- / composite video
- Voltage supply via USB port / 5V
- Accompanying software: Ulead Video Studio

DA-VC211A USB 2.0 Video Grabber

DIGITUS® SKYPE Skyfone USB 2.0 Dongle

- Compliant with USB 2.0 high speed operation
- Software with Xear 3D speaker shifter and virtual 5.1CH effects
- Compliant with USB audio device class specification v1.0
- Supports USB suspend/resume mode and remote wakeup with volume control
- Volume up, volume down, and playback mute support USB HID for host control synchronization
- Record mute with LED indicator for recode mute status
- Alternate zero bandwidth setting for releasing playback bandwidth on USB bus when this device is inactive
- Embedded high performance 16 bit audio DAC with earphone phone buffer
- Host side data loss noise reduction function
- Embedded 16 bit ADC input with microphone boost
- Embedded power on reset block
- Compatible with Win 98SE,Win ME, Win 2000 ,Win XP and Mac OS 9 , OS X

USB 2.0

DA-70771 Skype USB Dongle

DIGITUS® SKYPE USB telephone handset

- USB PnP interface
- Easy to use
- No external power supply required
- Integrated sound card
- Able to use as microphone/ speaker for all PC-based softphones such as Skype, MSN, ICQ, X-lite, Dialpad, MediaRing, Net2phone etc.

DA-70772 Skype USB telephone handset

DIGITUS® SKYPE USB Telephone with dial function

- Optimized for Skype with the plug-in driver
- Operate Skype calls with full keypad functions
- Ringing on incoming calls
- LC display and LED indicators
- USB PnP interface, no external power /soundcard required

DA-70773 Skype USB telephone, dialfunction

DIGITUS® SKYPE USB telephone handset

- Compliant to Skype and most VoIP software
- Support plug & play, USB compatible- no sound card needed
- Record and save your conversation as ".wav" file to PC
- Clear voice with unique technology to minimize the noise
- Instant volume adjust buttons
- Support all languages on screen display
- Offer speed dial
- Users able to set their own function keys on Window´s mode
- Default function keys for skype
- Compatible with Windows 2000/ XP

DA-70774 Skype USB telephone handset with display

DIGITUS® SKYPE USB speakerphone

- High quality speakerphone, ideal for conference calls
- Comply with USB 1.1 & USB 2.0 port
- No external power required
- Driver and sound card built-in
- Large LCD with backlight
- Phone ring for incoming calls, ring style and volume selectable
- Echo cancellation, noise reduction, full duplex communication
- Caller ID function
- Supported OS: Win 2000/ XP

DA-70775 SKYPE USB speakerphone

DIGITUS® SKYPE USB TelBox

- USB telbox
- Supports wireless phones
- 3 status LED (power, USB, line)
- 1 USB interface to PC, USB B
- 1 FXS for regular (analog) phone, RJ11
- 1 FXO for PSTN call relays, RJ11
- Driver built-in
- No external power needed
- Supported OS: Win 2000/ XP

DA-70776 SKYPE USB TelBox

DIGITUS® High performance USB 2.0 Graphicadapter

- Extend your desktop workspace (dual display support), mirror function
- Compliant with USB specifications 2.0
- Plug & Play compliant
- Compliant with EHCI specification
- Built-in a high quality 3D engine
- High performance 2D accelerator
- Display memory: 8 MB SDRAM
- Resolution up to 1280 x 1024, color depth up to 32 bit
- Windows 2000/XP compatible.

DA-70830 USB 2.0 Graphic Adapter

DIGITUS® Microscope camera with built-in lighting

NEW!

- Universal microscope camera for the computer with built-in white and bright lighting
- Magnification continuous 10 - 200x
- Screen capture resolution 640 x 480 pixel
- "Live view" with up to 30 fps
- USB 1.1 / 2.0 interface
- 1,8m USB Cable length
- Ideal for business and hobby e.g., for industrial inspection like textile and printing, for skin and scalp examination, for stamp, coin and gem collectors, for science and learning, as reading aid

DA-70350 USB Microscope camera

DIGITUS® Digital DVB-T mini Receiver for USB Port

NEW!

- Supports the DVB protocol (ETS 300 744)
- Digital TV reception
- Digital video recording in real time (DVR) and scheduled
- Elektronic program guide (EPG)
- Automatic channel scanning 6/7/8 M
- Videotext
- MPEG-II decoder
- Compact dimensions (79mm x 26mm x 13mm)
- Remote control
- Input resistance: 75 Ohm DIN
- Reception frequency: VHF: 174~230MHz/ UHF: 470~862MHz

DA-70781-A USB DVB-T receiver

DIGITUS® Analog TV and Digital DVB-T mini Receiver for USB Port

- Supports the DVB protocol (ETS 300 744)
- Digital and analog TV reception
- Digital video recording in real time (DVR) and scheduled
- Elektronic program guide (EPG)
- Automatic channel scanning 6/7/8 M
- Videotext
- MPEG-II decoder
- Compact dimensions (79mm x 26mm x 13mm)
- Remote control
- Input resistance: 75 Ohm DIN
- Reception frequency: VHF: 174~230MHz/ UHF: 470~862MHz

DA-70782 USB DVB-T/analog receiver

DIGITUS® Notebook Webcam

- Compliant to USB 1.1 spezification
- Manuel adjustable focus, automatic whitebalance, snapshot function, automatic exposure
- Resolution: 300k Pixel, 640x480 (VGA), 352x288, 320x240, 176x144, 160x120
- Framerates: up to 30fps
- Color: 24-bit TrueColor
- Color depth: 32 Byte
- JPEG-compression integrated
- OS: Win 2000/XP

DA-70810 USB Notebook Webcam

DIGITUS® USB 2.0 Webcam

- Compliant to USB 2.0 spezification
- 6 LED's for ambient light
- Integrated microphone
- Manuel adjustable fokus, automatic whitebalance, snapshot function, automatic exposure
- Resolution: 300k Pixel, 640x480 (VGA), 352x288, 320x240, 176x144, 160x120
- Framerates: up to 30fps
- Color: 24-bit TrueColor
- Color depth: 32 Byte
- JPEG-compression integrated
- Operatin System: Win 2000/XP

DA-70811 USB Notebook Webcam with 6 LEDs

DIGITUS® Stereo Multimedia Speaker Set 360W PMPO

- 2.0 Multimedia speaker
- Total output power: 6Watts
- Front access power on/off & volume control, LED indicator
- Magnetic shielded, headphone jack for private listening
- Speaker driver unit: 2 x 4" speaker a 3W
- Frequency response range: 80Hz-18KHz
- Product dimension: 81 mm x 207mm x 81mm

DA-10240 2.0 Speaker Set

DIGITUS® 2.1 Mini Sub-Woofer System, 450W PMPO

- 2.1 Multimedia speaker, wooden case
- Total output power : 14 Watts
- 2.1 Mini Sub-Woofer system with wired control
- Speaker driver unit : Woofer: 3" speaker with10W, Satelite: 2 x 2.25" speaker a 2W
- Frequency response range : 30Hz-20KHz
- Product dimension: Woofer: 130 mm x 145 mm x 161 mm, Satelite: 80 mm x 95 mm x 68 mm
- Accessories : 3,5mm stereo plug connection cable

DA-10250 2.1 Speaker Set

DIGITUS® 5.1 Home Theater System, 950W PMPO

- 5.1 Surround Sub-Woofer multimedia speaker, wodden case
- Total power output: 27 Watts
- On/off, Volume, Bass, Balance Control by IR Control Box
- Main unit: 3" speaker with 10W, Center: 3" speaker with 5W, Front 2 x 3" speaker a 3W, Rear 2 x 2.25"speaker a 3W
- Frequency response range: 30Hz-20KHz
- Product dimensions: Main unit (150 mm x170 mm x 171mm), Center (90 mm x 105 mm x 84 mm), Front (90 mm x 105 mm x 84 mm), Rear (80 mm x 95 mm x 68 mm), Control Box (160 mm x 55 mm x 180 mm)
- Accessories: 3,5mm stereo plug connection cable and cable set

DA-10260 5.1 Speaker Set

DIGITUS® Multimedia Headset with Microphone

- Stereo headset with microphone
- Speakers: 30mm dynamic, Impedance: 32 Ohm, Sensitivity: 101dB +/- 4dB, Frequency range: 100 - 15000 Hz, Max. input: 100mW
- Microphone: Frequency range: 50 - 16000Hz, Efficiency: -62dB +/- 3dB Operating voltage: 1V-10V (standard = 3V)
- Miscellaneous: Cable length: 1.8m, Connections 2x 3.5mm stereo jacks Weight 125g

DA-10201 Headset

DIGITUS® High Quality Multimedia Headset

- Specifications: Cable length: 1,8m, Volume control and mute switch, 2 x 3,5mm stereo jack
- Headphone: Frequency: 20- 18kHz, Impedance: 32 Ohms, Sensitivity: 102dB +/- 4%
- Microphone: Frequency: 20- 16kHz, Impedance: Low, Sensitivity: -40dB +/- 3dB

DA-10221 Headset High Quality

DIGTUS® Multimedia Headset with Microphone

- Closed, stereo headphones
- Ideal for PC, notebook, internet telephony, VoIP, Games, CD, MP3, DVD
- Volume control in cable
- Light design and soft ear pads for high wearing comfort
- Flexible microphone arm for placement and movement
- Cable length: 2,4m
- Volume control
- 2 x 3,5mm stereo jack
- Frequency: 8 - 22kHz
- Impedance: 32 Ohms @ 1kHz
- Sensitivity: 105dB/mW
- Microphone: Ø 9x7 mm
- Microphone sensitivity: 58dB +/- 2dB

DA-10225 Headset Hight Quality, volume control

DIGITUS® Multimedia Microphone with Stand

- Compact multimedia microphone with stand, adjustable
- Condenser microphone
- Frequency range: 50 - 16000Hz
- Sensitivity: -60dB +/- 3dB (0dB= 1V/μ BAR at 1KHz)
- Operating voltage: 1V-10V (standard = 3V)
- Cable length: 1,8m
- Connector: 3.5mm stereo jack
- Weight: 125g

DA-10101	Desktop Microphone

DIGITUS® Reusable cable ties, pack of 5

- Velcro fastener
- Five different colours
- Total length 16cm
- Width 16mm

DA-CT4001	Cable Ties, 5 pcs.

DIGITUS® Mouse Pads, 3 mm

- Colours: red, blue, green, grey and black
- Logo printing and additional colors upon request
- Dimensions: 250mm x 220mm x 3mm

DA-50101	Mouse Pad red
DA-50102	Mouse Pad blue
DA-50103	Mouse Pad green
DA-50104	Mouse Pad black
DA-50105	Mouse Pad gray

DIGITUS® Stereo Earphone Set

- Large sound volume
- Bilateral laid cable
- Direct connectable to MP3 Player, portable cassette devices, CD Player, DAT recorders and HiFi systems
- 3,5mm stereo Plug, cable length: 66cm
- 15mm Speaker diameter
- Magnet type: NdFeB
- Frequezy reponse: 20-20.000 Hz
- Impedance: 32 Ohm
- Sensitivity: 85 +/- 3dB
- Max. Power: 3mW

DA-10223	MP 3 Earphone Set, silver

DIGITUS® USB 2.0 Extension Cable, A to A

- Double shielded
- Cable UL2725, 2 x AWG24, 2 x AWG28
- USB 2.0 compatible and certified

DB-130260	2m
DB-130277	3m
DB-130284	5m

DIGITUS® Keyboard-Wrist Pads

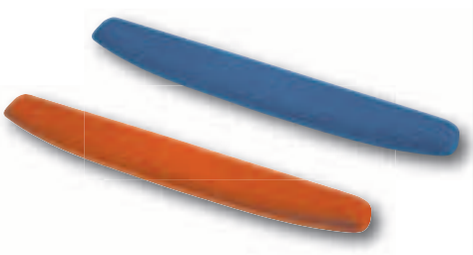

- Ergonomically designed keyboard rest
- Gel-filled wrist rest for supporting the forearm while using the keyboard
- Available in red or blue
- Dimensions: 475mm x 80mm

DA-50124	Keyboard-Wrist Pad blue
DA-50125	Keyboard-Wrist Pad red

DIGITUS® MP3 Earphone Set

- Large sound volume
- Powerful stereo Sound
- Equillbrated bass-system
- Direct connectable to MP3 Player, portable cassette devices, CD Player, DAT recorders and HiFi systems
- 3,5mm stereo Plug, cable length: 70cm, 16mm Speaker diameter
- Magnet type: NdFeB, Frequezy reponse: 20-20.000 Hz
- Impedance: 32 Ohm, Sensitivity: 83 +/- 3dB
- Max. Power: 3mW

DA-10224	MP 3 Earphone Set, black

DIGITUS® USB 2.0 extension cable with Docking Station

- Use this USB extension for extending distances
- Easy USB port access on your desk
- Elegantly styled base designed specifically to provide secure platform for USB devices that need to stand in upright position
- Comply with USB 1.1 / 2.0 version
- 1.5m cable length

DA-DEC-B	USB Dockball

DIGITUS® Mouse-Wrist Pads

- Ergonomically designed mouse pads
- Gel-filled wrist rest for supporting the forearm
- Available in red or blue
- Dimensions: 225mm x 180mm x 30mm

DA-50122	Mouse-Wrist Pad blue
DA-50123	Mouse-Wrist Pad red

DIGITUS® 3-Button Mouse, PS/2 and Serial

- Standard ball mouse
- 3 Button scrolling wheel
- PS2 Interface, green
- 520 dpi
- Rubber wheel with button switch function
- Ergo design for right / left using
- 1,80m connection wire

DA-20115 PS/2 Mouse

DIGITUS® Ergonomic Optical Mouse

- Standard optical mouse
- 3 Button scrolling wheel
- PS2 interface, green by adapter
- USB A type connector, black
- 800 dpi
- Rubber wheel with button switch function
- Ergo design for right / left using
- 1.80m connection wire

DA-20116 Mouse optical, combo
DA-20117 Mouse optical, wireless, USB

DIGITUS® Laser Mouse

- Wired laser mouse
- 6 Button scrolling wheel, office function
- USB A type connector, black
- PS2 connector, green adapter
- 800 dpi laser technology
- Rubber wheel with button switch function
- Rubber side parts for better grip
- Ergo design for right / left using
- 1.80m connecting wire

DA-20118 Mouse, Laser, combo
DA-20119 Mouse, Laser, wireless, combo

DIGITUS® Wireless Keyboard & Mouse Set

- Multimedia keyboard
- 105 Button + 3 x Office + 8 x Internet + 8 x Multimedia + 2x Power
- Direct internet & explorer access
- Volume & titel control by direct button
- Wireless optical mouse
- 3 Button scrolling wheel
- USB A type connector, black
- 800 dpi
- Rubber wheel with button switch function
- Rubber side parts for better grip
- Ergo design for right / left using
- 1.80m working distance
- 27 MHz and 256 ID`s for multi using in same room

DA-20150 Keyboard and Mouse Set, wireless

DIGITUS® Numeric Keyboard USB

- Compliant with USB
- Plug and play
- Selfpowered
- LED indicator for activity
- Operating Voltage: 5V max. 250mA
- Dimension (WxDxH):134mm x 94mm x 20mm

DA-20220-1 numeric Keyboard

DIGITUS® Numeric Keyboard with calculator function USB

- Use as numpad and calculator (12 digits)
- Easy installation – no drivers required
- Integrated 2 port USB Hub, USB 1.1 compliant
- Anodized aluminum case design: light, antirust and elegant slim shape
- Offer extra num lock key & LED to change keypad status
- Non-syncing <Num>-Lock
- Send the calculation result to computer systems
- Power supply: USB port or battery (AG13)
- Dimensions (WxDxH): 80 mm x 150 mm x 21.5 mm

DA-20221 numeric Keyboard with calculator

DIGITUS® USB Bluetooth 2.0 EDR Adapter, Class 2

- Bluetooth 1.1 / 1.2 / 2.0 and USB 1.1 compatible
- Supported data rates: up to 3 Mbps(Max)
- Range: up to 80 m
- CSR Bluetooth Chipset
- Toshiba Bluetooth Software
- Suitable for Win 98SE/ME/2000/XP
- Dimension: (LxWxH) 59mm x 7mm x 19 mm
- Weight: 8 g

Bluetooth2.0 high speed

DN-3017 Bluetooth USB Adaper, Class 2

DIGITUS® USB Bluetooth 2.0 EDR Adapter, Class 1

- Bluetooth 1.1 / 1.2 / 2.0 and USB 1.1 compatible
- Supported data rates: up to 3 Mbps(Max)
- Range: up to 150 m
- CSR Bluetooth Chipset
- Toshiba Bluetooth Software
- Suitable for Win 98SE/ME/2000/XP
- Dimension: (LxWxH) 59mm x 7mm x 19 mm
- Weight: 8 g

Bluetooth2.0 high speed

DN-3018 Bluetooth USB Adaper, Class 1

DIGITUS® USB Bluetooth Adapter, Class 2

- Bluetooth 1.1, Compact Flash Type I and PCMCIA 16 Bit compatible
- Supported data rates: up to 732 KBps / s
- Range up to 20m
- Suitable for Win98SE/ME/2000/XP and Pocket PC 2002
- Communicates with all standard Bluetooth devices

Bluetooth

DN-3009M Bluetooth CF Adaper, Class 2

DIGITUS® Bluetooth Headset

- Compatible with Bluetooth 1.2 standard
- Data transfer rate up to 732 Kbps
- Range up to approx. 15m
- Ultra-compact design
- Rechargeable polymer battery
- Standby time up to 120 hours
- Talk time up to 5 hours
- Compatible with most currently available mobile phones
- Dimensions: (LxWxH) 58mm x 11mm x 25mm

Bluetooth

DN-3011M Bluetooth Headset

DIGITUS® Bluetooth Headphone with Microphone

- Compatible with Bluetooth 1.2 standard
- Range up to approx. 15m
- Rechargeable polymer battery
- Standby time up to 180h, workingtime up to 6,5h
- Support MSN, Skype and other internet messenger application, or listening to MP3 and other audio streaming
- Crystal clear audio sound effect
- Compatible with most currently available mobile phones
- Re-dial and receive calls without touching your phone.
- One switch for pick up and pairing, volume up and down adjustment, easy to click.

Bluetooth

DN-3013 Bluetooth Stereo Headset

DIGITUS® Bluetooth Audio Transmitter

- Bluetooth Audio Transmitter: Plug into your Stereo audio source via audio jack in your MP3 .PSP, PC, TV, DVD player, ipod, home audio system …etc.
- Compatible with Bluetooth 1.1 / 1.2 standard
- Data transfer rate up to 732 kbps
- Range up to approx. 15m
- Ultra-compact design
- Rechargeable polymer battery
- Working time up to 6,5 hours
- Automatically pair with Stereo Bluetooth headphone by pressing a button
- Support A2DP profile
- Size: 52mm x 14mm x 22 mm

Bluetooth

DN-3014 Bluetooth Audio Transmitter

DIGITUS® GPS USB Notebook Receiver

The DIGITUS® DA-80100 receiver which is based on the newest SiRF III technology captivates by excellent GPS receive caracteristics and elegant Design. This receiver offers minimum starting times, because our high-quality components, as well as item data determine the high number of effective correlators even from weakest GPS signals. The DA-80100 is protected against splash-water and can cling with the inserted magnet on the autoroof, if a placement on the instrument panel is not possible.

- SiRF Star III Technologie
- 20 parallel satellite-tracking chanenesl for fast acquisition and reacquisition
- Built-in hardware Tracking Loop Precessor WAAS/EGNOS Demodulator and Beacon support
- Internal supersensitive active GPS antenna -159dBW
- DGPS no ext. DGPS signal
- WAAS / ESTB-EGNOS 0,5 to 3 m
- CEP 5 to 25m (w/o SA)
- CEP rate 0,1m/s (w/o SA)
- New positioning within approx. 0,1 s
- Hot start approx. 8 s
- Warm start approx. 38 s
- Cold start approx. 45 s
- 1920 time/frequency-channel
- 200.000 effective correlators for fast Time-to-First-Fix (TTFF), enhanced algorithms provide superior navigation performance
- Baudrate: 38,400 bps
- Protocols: NMEA 0183, GGA, GSA, GSV, RMC, GLL, VTG, GNS2.0, SiRF Binary
- Interface: RS-232 RS-232 NMEA 0183, connect via USB
- LED indicator for GPS status
- Dimensions: 64.5 x 42 x 17.8 mm
- Storage temperature -55°C to +100°C
- operating temperature -40°C to +85°C
- humidity 5% to 95%, non-condensing
- Low power consumption: <80mA - 4,5-5,5V

DA-80100 GPS USB Notebook Receiver

DIGITUS® GPS Bluetooth Receiver

The new, elegant and graceful designed Bluetooth receiver is equipped with the newest SiRFstar III technology. Particularly it's rechargeable Lithium-Ion battery of up to 14 hours operating use, make the DIGITUS® DA-80200 GPS receiver a persistent companion for your Notebook, PDA or Smartphone. (also rechargeable via USB)

- For PDA, notebook, smartphone
- Bluetooth interface, Bluetooth version 1.1 compatible
- Bluetooth class 2, Bluetooth range: up to 10 m
- SiRF Star III Technologie
- 20 parallel satellite-tracking chanenesl for fast acquisition and reacquisition
- Built-in WAAS/EGNOS Demodulator
- Internal supersensitive active GPS antenna -159dBW
- FLASH based program memory, new software revisions upgradeable through serial interface
- Built-in rechargeable Lithium ion battery
- DGPS no ext. DGPS signal
- New positioning within approx. 0,1 s
- Hot start approx. 8 s
- Warm start approx. 38 s
- Cold start approx. 45 s
- 200.000 effective correlators for fast Time-to-First-Fix (TTFF), enhanced algorithms provide superior navigation performance
- Baudrate: 38,400 bps
- Protocols: NMEA 0183, GGA, GSA, GSV, RMC, VTG, GNS2.0, Optional GLL, SiRF Binary
- Interface: RS-232 RS-232 NMEA 0183, connect via PS2
- 3 LED Function: Bluetooth, navigation, Battery and charger status indication
- Dimensions: 63.0 x 41.0 x 17.1 mm
- Storage temperature -10°C to +60°C
- Operating temperature -20°C to +85°C
- Operating humidity 5% to 95%, no condensing
- Lithium-Ion Battery: up to 14 hours of operating use

DA-80200 GPS Bluetooth Receiver

DIGITUS® USB Traveller Kit

4 part USB Travel Kit in a case:
- 1x USB 2.0 4-port portable hub
  Red LED for power indication
  Bus powered
  USB Type A cable connector can be stowed within the body
- 1x USB light
  Flexible gooseneck design
  Powered by USB port
  Provide bright environment for ultra-light LED
- 1 x USB optical mini mouse
  Designed with retractable cable
  Easy internet surfing and windows browsing
  800 dpi resolution
- 1 x USB keypad
  18 numeric keys
  One power LED
  Dimension (LxWxH): 110 mm x 75 mm x 14.5 mm
- High quality zipped travelling bag (LxWxH): 224 mm x 157 mm x 46 mm

DA-70790 Notebook Traveller Kit

DIGITUS® Notebook - Car & Airplane Power Converter

- Individual polarity and voltage setting
- Input voltage 12V/DC via DC on-board power socket or airplane adapter
- Voltage multiplier for setting the output voltage, selectable: 15/16/18/ 19/20V/24V DC at 5.0 A max
- Maximum power consumption of the consumer 3500 mA
- Built-in surge protection
- Input protection 10 A (Flink)
- 5 notebook adapters as well as a special adapter for the Apple iBook included

DA-10213 Notebook Power Converter

DIGITUS® USB LED Light

- White LEDs (efficient and energy saving)
- Powered by the USB port of a PC or Notebook
- Universal clip
- Clearly illuminates the keyboard or documents in low light environments
- Turns on when PC is powered up
- Cable length 0.8m

DA-70756 USB LED Light

DIGITUS® USB LED Light with flexible gooseneck

- 3 white LEDs (efficient and energy saving)
- Powered by the USB port of a PC or Notebook
- Flexible gooseneck
- Clearly illuminates the keyboard or documents in low light environments
- Length 0.4m

DA-70757 USB LED Light with lexible gooseneck

DIGITUS® Retractable Cable Set

5 part cable- & adapterset in a case:
- 1 x RJ 45 cable, male <=> male
- 1 x RJ 11 cable, male <=> male
- 1 x Headset / MIC combination, 2 x 3.5 connectors
- 1 x USB cable, A male <=> B male
- Cable length 1.2m - retractable
- 1 x adapter USB A male <=> USB B male
- In a practical and handy case with zipper
- Ideally for on the way as well as for service and support

DA-RET-SET Retractable Cable Set, 5 pcs.

DIGITUS® Retractable USB connector cable 1.2 m

- To connect USB devices to computers for example
- Suitable for service people and engineers
- Ideal when on the move (e.g. travelling, with notebooks)
- USB A -> USB B male / male, 1.2 m retractable wire

DA-RET-USB01 USB A/B 1,2m

DIGITUS® Retractable RJ45 connector cable 1.2 m

- To connect computers to a network for example
- Suitable for service people and engineers
- Ideal when on the move (e.g. travelling, with notebooks)
- 2 x RJ45 male, 1.2 m retractable wire

DA-RET-RJ45 RJ45 male/male 1,2m

DIGITUS® Retractable RJ11 connector cable 1.2 m

- To connect modems and phones for example
- Suitable for service people and engineers
- Ideal when on the move (e.g. travelling, with notebooks)
- 2 x RJ11 male, 1.2 m retractable wireg

DA-RET-RJ11 RJ11 male/male 1,2M

DIGITUS® Professional Line Notebook Bag

- Designed in Germany
- Interior fully padded with variable inside dividers
- One hook and loop band for securing the notebook
- Various inside pockets
- Including flat zipper pocket in front, with additional outer compartment
- Padded grip and shoulder strap
- Color: grey, beige
- Material: High quality tweed nylon
- Exterior dimensions: 41,5 cm (W) x 31 cm (H) x 15 cm (D)
- Dimension Notebook compartment: ca. 40,0cm (W) x 28,0cm (H) x 6,0 cm (D)

DA-10401 Notebook Bag

DIGITUS® Professional Line Notebook Bag

- Designed in Germany
- Interior fully padded with variable inside dividers
- One hook and loop band for securing the notebook
- Various inside pockets
- Including flat zipper pocket in front, with additional outer compartment
- Padded grip and shoulder strap
- Color: grey, beige
- Material: High quality tweed nylon
- Exterior dimensions: ca. 41,5 cm (W) x 31 cm (H) x 15 cm (D)
- Dimension Notebook compartment: ca. 40,0cm (W) x 28,0cm (H) x 6,0 cm (D)

DA-10402 Notebook Bag

DIGITUS® Professional Line Notebook Bag

- Designed in Germany
- Interior fully padded with variable inside dividers
- Seperate document pocket and one mesh-web pocket with zipper
- Various inside pockets
- Including flat zipper pocket in front
- Padded grip and shoulder strap
- Color: grey, beige
- Material: High quality tweed nylon
- Exterior dimensions: 41,5 cm (W) x 31 cm (H) x 15 cm (D)
- Dimension Notebook compartment: ca. 35,0cm (W) x 28,0cm (H) x 4,5 cm (D)

DA-10403 Notebook Bag

DIGITUS® Professional Line Notebook Bag

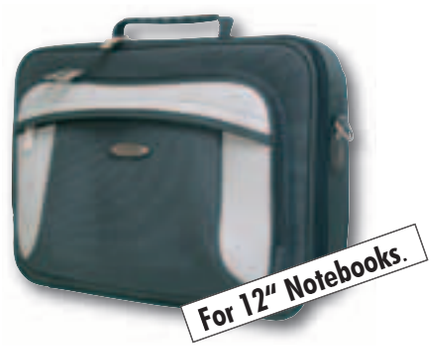

- Designed in Germany
- Interior fully padded with variable inside dividers
- One hook and loop band for securing the notebook
- Various inside pockets
- Including flat zipper pocket in front, with additional outer compartment
- Padded grip and shoulder strap
- Color: grey, beige
- Material: High quality tweed nylon
- Exterior dimensions: 36cm (W) x 30cm (L) x 15cm (H)

DA-10404 Notebook Bag

DIGITUS® Professional Line Notebook Bagpack

- Designed in Germany
- Large padded inside pocket with various inside pockets
- 2 zipper pockets in front, with various inside pockets
- Padded grip and shoulder straps
- Color: grey, beige
- Material: High quality tweed nylon
- Exterior dimensions: 42 cm (W) x 32,5 cm (H) x 15 cm (D)
- Dimension Notebook compartment: ca. 35,0cm (W) x 28,0cm (H) x 4,5 cm (D)

DA-10420 Backpack

DIGITUS® Professional Line 2 in 1 Backpack with Telescoping handle

- Designed in Germany
- 2 large inside pockets with zipper, one of them with various inside pockets
- One zipper pocket in front, with various inside pockets
- Padded grip and shoulder straps
- Double extending telescoping handle, 2 ball-bearing castors and 2 sturdy and no-slip plastic feet
- Zipper makes possible to seperate the Backpack from the Telescoping compartment
- Color: grey, beige
- Material: High quality tweed nylon
- Exterior dimensions: 42 cm (W) x 32,5 cm (H) x 15 cm (D)
- Dimension Notebook compartment: ca. 35,0cm (W) x 28,0cm (H) x 4,5 cm (D)

DA-10421 Backpack with handle

DIGITUS® Notebook Bag, Smart Travel

- Designed in Germany
- High-quality material in black colour
- Large inside pocket with packing straps and a small zipper pocket
- 2 zipper pockets in front, one suitable for a notebook, padded. Both with various inside pockets
- Double extending telescoping handle, 2 ball-bearing castors and 2 sturdy and no-slip plastic feet
- Exterior dimensions: 53 cm (W) x 31 cm (H) x 24 cm (D)

DA-10217 Notebook Bag

DIGITUS® Notebook Bag, Smart Business Line

- Designed in Germany
- Interior fully padded with variable inside dividers
- Two hook and loop bands for securing the notebook
- Various inside pockets
- Including flat zipper pocket in front
- Padded grip and shoulder strap
- Color: black
- Material: High quality tweed nylon
- Exterior dimensions: 35 cm (W) x 28.5 cm (H) x 9.5 cm (D)

DA-10203 Notebook Bag

DIGITUS® Notebook Bag, Smart Business Line

- Designed in Germany
- Interior fully padded with variable inside dividers
- Two hook and loop bands for securing the notebook
- Various inside pockets
- Including flat zipper pockets on front and back
- Padded grip and shoulder strap
- Color: black
- Material: High quality tweed nylon
- Exterior dimensions: 34 cm (W) x 28.5 cm (H) x 12 cm (D)

DA-10204 Notebook Bag

DIGITUS® Notebook Bag, Smart Business Line

- Designed in Germany
- Interior fully padded with variable inside dividers
- Two hook and loop bands for securing the notebook
- Various inside pockets
- Including flat zipper pockets on front and back
- Padded grip and shoulder strap
- Color: black
- Material: High quality tweed nylon
- Exterior dimensions: 34 cm (W) x 28.5 cm (H) x 12 cm (D)

DA-10205 Notebook Bag

DIGITUS® Notebook Bag, Smart Travel / Business

- Designed in Germany
- Interior fully padded with variable inside dividers
- Two hook and loop bands for securing the notebook
- Various inside pockets
- Including flat zipper pockets on front and back
- Padded grip and shoulder strap
- Material: High quality tweed nylon
- Color: black
- Exterior dimensions: 40.5 cm (W) x 30.5 cm (H) x 15 cm (D)

DA-10206 Notebook Bag

DIGITUS® Notebook Bag, Smart Travel

- Designed in Germany
- Interior fully padded with variable inside dividers
- Extra-deep, two hook and loop bands for securing the notebook
- Various inside pockets
- Including flat zipper pocket in front
- Padded grip and shoulder strap
- 3-fold telescoping grip
- 2 ball-bearing castors and 2 stabile and slip-proof plastic feet
- Material: High quality tweed nylon, color: black
- Exterior dimensions: 40.5 cm (W) x 30.5 cm (H) x 15 cm (D)

DA-10207 Notebook Bag

DIGITUS® Notebook Bag, Smart Business Line

- Designed in Germany
- High-quality material
- Various inside pockets, pocket with pressure catch in front with inside divider (e.g. mobile phone pocket, pen holders etc.)
- Zipper bag with document pocket in back
- Color: black
- Exterior dimensions: 41.0 cm (W) x 31.0 cm (H) x 10,5 cm (D)

DA-10216 Notebook Bag

DIGITUS® Backpack Travel

- Designed in Germany
- High-quality material in black colour
- Two large inside pockets, one with document pocket and one padded suitable for notebook
- Front zipper pocket with telephone and business card compartment and pen holders
- Carry handle and padded carry strap
- Exterior dimensions: 43 cm (W) x 32 cm (H) x 12 cm (D)T)

DA-10218 Notebook Bagpack

DIGITUS® Backpack, Smart Leisure

- Designed in Germany
- Front inside pocket with zipper lock
- Including two small zipper pockets on front
- Comfortable, padded carry grip
- Material: High quality polyester material
- Color: black
- Exterior dimensions: 38 cm (W) x 31,5 cm (H) x 12 cm (D)

DA-10209 Backpack

DIGITUS® CD-ROM Storage Case

- High-quality material, colour black
- Dimension: 17 cm (W) x 17 cm (H) x 7,5 cm (D)

DA-10210 for 48 CDs

DIGITUS® CD-ROM Storage Case

- High-quality material, colour black
- Dimension: 29 cm (W) x 16 cm (H) x 4 cm (D)

DA-10211 for 48 CDs

DIGITUS® CD-ROM Storage Case

- High-quality material, colour black
- Dimension: 18 cm (W) x 17 cm (H) x 7,5 cm (D)

DA-10212 for 96 CDs

DIGITUS® CD-ROM Storage Case

- High-quality material, colour black
- Dimension: 31 cm (W) x 32 cm (H) x 10 cm (D)

DA-10220 for 200 CDs

DIGITUS® CD-ROM and DVD Cases

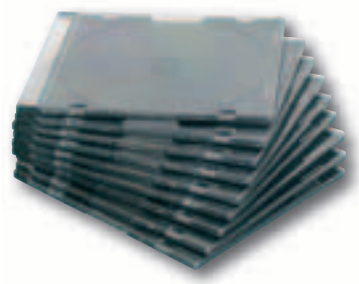

- DVD / CD Slim Case
- Transparent plastic
- Packaging unit: 10 Pcs.

DA-CD-SC Slim Case

DIGITUS® CD-ROM and DVD Cases



- DVD / CD Jewel Case
- Transparent plastic
- Packaging unit: 10 Pcs.

DA-CD-JC Jewel Case

DIGITUS® DVD Case

- For two DVD's / CD's
- Packaging unit: 5 Pcs.
- Dimension: 190 x 130 x 5mm

DA-DVD-DC Double Case

DIGITUS® DVD Case

- For one DVD/CD with additional manual
- Packaging unit: 5 Pcs.
- Dimension: 190 x 130 x 5mm

DA-DVD-SC Single Case

DIGITUS® External 3,5" Floppy Drive USB 1.1

- Compact and light
- Floppy type: 2HD (double sided high density)
- Floppy storage capacity: 1.44 MB
- No external power supply required for operation
- Operating voltage 5V DC via the USB bus
- Maximum achievable data transmission rate of 12 Mbps
- PNP capable thanks to USB 1.1
- System requirements: iMac, iBook, G3 or G4 w. USB port (USB 1.1 or USB 2.0) IBM compatible PC w. USB port (USB 1.1 or USB 2.0)
- Operating system requirements: Mac OS 8.6 or higher Win 98SE/ME/2000/XP

DA-70490 External USB Floppy Drive

DIGITUS® Pocket KVM Switch PS/2, 2-Port

- Control two PCs with one PS/2 keyboard, one PS/2 mouse and one monitor
- Simple installation - no additional software required
- PC selection via hotkey
- Excellent video quality - up to 1920 x 1440, 200 MHz bandwidth
- Supports DDC, DDC2, DDC2B, DDC2AB
- Hot Plug and Play
- Keyboard and mouse emulation for faultless booting of the computer
- Autoscan (5,10,15,20,25,30 sec. options) / autoskip function
- No external power supply required
- Integrated KVM cable for connection of two PCs 1.5 m
- Supports standard PS/2 mouse, Microsoft IntelliMouse and full support for Microsoft IntelliPoint 5.0 mouse driver and Logitech Mouse Ware driver
- Supports Windows 95/98/98SE/ME/NT4.0/2000/XP, DOS, Linux, Novell Netware, FreeBSD

DC OC12	KVM with PS/2, 2-Port
DC OC12A	KVM with PS/2 and Audio, 2-Port
DC OC12U	KVM with USB, 2-Port

DIGITUS® Compact KVM Switch, PS/2, 2-Port

- Control multiple PCs with one PS/2 keyboard, one PS/2 mouse and one monitor
- Simple installation - no additional software required
- PC selection via pushbutton or hotkey
- Excellent video quality - up to 1920 x 1440, 200 MHz bandwidth
- Supports DDC, DDC2, DDC2B, DDC2AB
- Hot Plug and Play
- Keyboard and mouse emulation for faultless booting of the computer
- Autoscan (5,10,15,20,25,30 sec. options) / autoskip function
- No external power supply required
- Incl. 2 sets of connector cables
- Supports standard PS/2 mouse, Microsoft IntelliMouse and full support for the Microsoft IntelliPoint 5.0 mouse driver & Logitech Mouse Ware driver
- Supports Windows 95/98/98SE/ME/NT4.0/2000/XP, DOS, Linux, Novell Netware, FreeBSD

DC IC612I	KVM with PS/2, 2-Port
DC IC614I	KVM with PS/2, 4-Port

DIGITUS® Video Splitter 2-Port and 4-Port

- With 300 Mhz pixel frequenzy
- Extends the video signal up to 65 meter
- Supports DDC, DDC2, DDC2B
- Can be cascaded
- Compatible with standard VGA card
- Max. Resolution 2048 x 1536 @ 60 Hz
- Signal: VGA, SVGA, XGA, QXGA, UXGA Multisync
- Dimension: 100 x 81,5 x 27,5mm

DC KVS-12	Video Splitter, 2-Port
DC KVS-14	Video Splitter, 4-Port

DIGITUS® USB-KVM, 2-Port

- Controls several PCs with one PS/2- or USB-keyboard, one PS/2- or USB-mouse and one monitor
- Simple installation - no additional software needed
- PC-choice over push-buttons or Hot-Key
- Excellent video quality - up to 2048 x 1536 @ 85Hz
- Supports DDC, DDC2
- Hot Plug and Play
- Emulates a keyboard on each PC to allow your computers to boot normally without a keyboard error
- Autoscan (5 to 250 sec.)
- No external power supply needed, self powered through PS/2 and/ or USB connection
- Fully compliant with the USB 1.1/ 2.0 specification
- Supports Windows 95/98/98SE/ME/NT4.0/2000/2003 Server/XP, Linux, Mac and Sun Micro Systems

DC-11201	KVM with USB Hub, 2-Port

DIGITUS® Desktop USB-KVM, 4-Port

- Controls several PCs with one PS/2 or USB-keyboard, one PS/2 or USB-mouse and one monitor
- Simple installation - no additional software needed
- PC-choice over push-buttons, Hot-Key or OSD-Utility
- Excellent video quality - up to 1920 x 1440
- Supports DDC, DDC2
- Hot Plug and Play
- Emulates a keyboard on each PC to allow your computers to boot normally without a keyboard error
- Autoscan- (5 bis 250 sec.)
- USB Bus Powered and downstream port activated by external PowerDC 5V 2A
- incl. 3-Port USB - Hub
- Supports Win 95/98/98SE/ME/NT4.0/2000/2003 Server/XP, Linux, Mac and Sun Micro Systems

DC-12201	KVM with USB Hub, 4-Port

DIGITUS® Desktop Combo-KVM-Switch - DVI, Audio, 3- Port

- Controls several PCs with one PS/2- or USB-keyboard, one PS/2- or USB-mouse and one DVI-monitor, incl. audio-suply
- Simple installation - no additional software needed
- PC-choice over push-buttons or Hot-Key
- Excellent video quality - up to 1600 x 1200 @ 60 Hz
- Supports DDC, DDC2 DVI UXGA
- Hot Plug and Play
- Emulates a keyboard on each PC to allow your computers to boot normally without a keyboard error
- Autoscan (5 bis 250 sec.)
- No external power suply unit needed, self powered through USB connection
- Fully compliant with the USB 1.1/ 2.0 specification
- Supports Win 95/98/98SE/ME/NT4.0/2000/2003 Server/XP, Linux, Mac and Sun Micro Systems

DC-11801	KVM with USB, DVI, 3-Port

DIGITUS® Desktop KVM Switch, PS/2 with mouse-clicking function, 2-to 4-port

- Control several PCs via a PS/2 keyboard, a PS/2 mouse and a monitor
- Easy installation - no additional software required
- PC selection via buttons, hot keys or mouse click (hot key function can be switched off)
- Excellent video quality - up to 1920 x 1440, 200MHz bandwidth
- Supports DDC, DDC2, DDC2B, DDC2AB
- Hot plug and play
- Keyboard and mouse emulation for error free booting of the computer
- Autoscan (5,10,15,20,25,30 sec. options) / autoskip function
- No external power supply required
- Supports Standard-PS/2-Maus, Microsoft IntelliMouse plus complete support for Microsoft IntelliPoint 5.0 mouse drivers & Logitech Mouseware-drivers
- Supports Windows 95/98/98SE/ME/NT4.0/2000/XP, DOS, Linux, Novell Netware, FreeBSD

DC IC812I-MC KVM Switch, PS/2, 2-Port
DC IC814I-MC KVM Switch, PS/2, 4-Port

DIGITUS® KVM-Switch DVI, 2- and 4-Port

- Access and control 2 PC with one PS/2 keyboard, mouse and one DVI monitor
- Support standard PS/2 mouse, MS Intelli Mouse
- Fully supports MS IntelliPoint 5.0 & Logitech Mouseware drivers
- Support WIN 95/98/98SE/ME/NT4.0/2000/XP, DOS, Linux, Novell Netware, Free BSD
- Resolution up to 1280x1024, DDC2
- Selection via Push button, Hotkey
- Easy install – no additional software required
- Hot Plug ´n´ Play
- Keyboard and mouse emulation for error free system boot
- Autoscan (5,10,15,20,25,30 sec.), autoskip

DC IC812-ID KVM Switch DVI, 2-Port
DC IC814-ID KVM Switch DVI, 4-Port

DIGITUS® Desktop KVM Switch, PS/2 with mouse-clicking function, Audio, 2- and 4-Port

- Control several PCs via a PS/2 keyboard, a PS/2 mouse and a monitor
- Easy installation - no additional software required
- PC selection via buttons, hot keys or mouse click (hot key function can be switched off)
- Clear on-screen display (OSD)
- Excellent video quality - up to 1920 x 1440, 200MHz bandwidth
- Supports DDC, DDC2, DDC2B, DDC2AB
- Hot plug and play
- Keyboard and mouse emulation for error free booting of the computer
- Autoscan (5,10,15,20,25,30 sec. options) / autoskip function
- Power supply via mains adaptor; included
- incl. 2 sets of connection cable w/audio
- Supports Standard-PS/2-Maus, Microsoft IntelliMouse plus completesupport for Microsoft IntelliPoint 5.0 mouse drivers & Logitech Mouse ware-drivers
- Supports Windows 95/98/98SE/ME/NT4.0/2000/XP, DOS, Linux, Novell Netware, FreeBSD

DC IC812IA-MC KVM Switch, PS/2, 2-Port Audio
DC IC814IA-MC KVM Switch, PS/2, 4-Port Audio

DIGITUS® Desktop KVM switch PS/2 with mouse-clicking function, 6 port

- Control several PCs via a PS/2 keyboard, a PS/2 mouse and a monitor
- Easy installation - no additional software required
- PC selection via buttons, hot keys or mouse click (hot key function can be switched off)
- Excellent video quality - up to 1920 x 1440, 200MHz bandwidth
- Supports DDC, DDC2, DDC2B, DDC2AB
- Hot plug and play
- Keyboard and mouse emulation for error free booting of the computer
- Autoscan (5,10,15,20,25,30 sec. options) / autoskip function
- Incl. 19" installation brackets 1HE
- Supports Standard-PS/2-Maus, Microsoft IntelliMouse plus complete support for Microsoft IntelliPoint 5.0 mouse drivers & Logitech Mouse ware-drivers
- Supports Windows 95/98/98SE/ME/NT4.0/2000/XP, DOS, Linux, Novell Netware, FreeBSD

DC IC816I-MC KVM Switch, PS/2. 6-Port

DIGITUS® Desktop KVM switch PS/2 with mouse-clicking function, 8-Port

- Control several PCs via a PS/2 keyboard, a PS/2 mouse and a monitor
- Easy installation - no additional software required
- PC selection via buttons, hot keys or mouse click (hot key function can be switched off)
- Excellent video quality - up to 1920 x 1440, 200MHz bandwidth
- Supports DDC, DDC2, DDC2B, DDC2AB
- Hot plug and play
- Keyboard and mouse emulation for error free booting of the computer
- Autoscan (5,10,15,20,25,30 sec. options) / autoskip function
- Incl. 19" installation brackets 1HE
- Supports Standard-PS/2-Maus, Microsoft IntelliMouse plus complete support for Microsoft IntelliPoint 5.0 mouse drivers & Logitech Mouse ware-drivers
- Supports Windows 95/98/98SE/ME/NT4.0/2000/XP, DOS, Linux, Novell Netware, FreeBSD

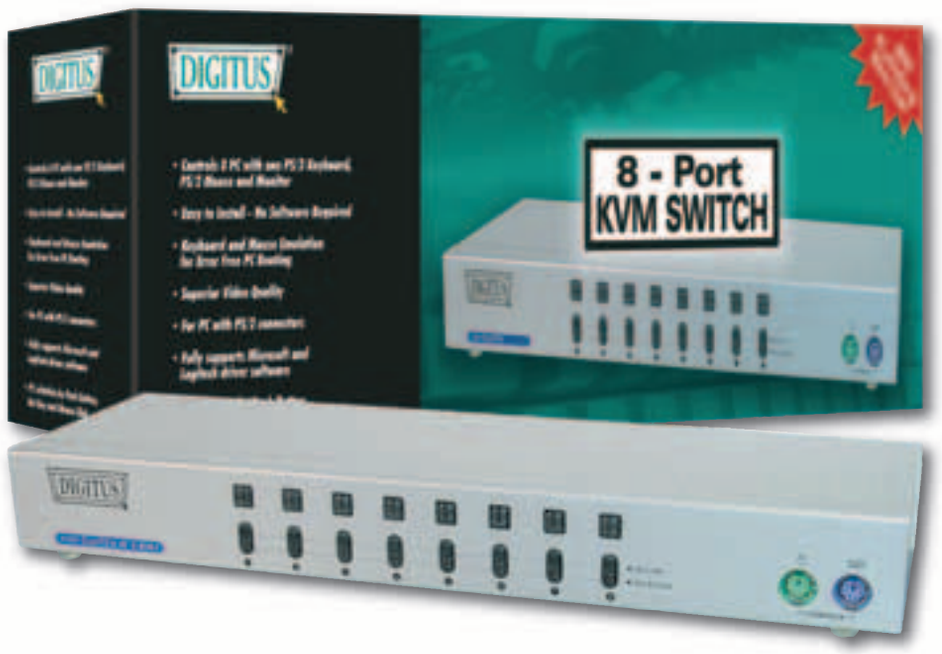

DC IC818I-MC KVM Switch, PS/2, 8-Port

DIGITUS® Desktop KVM-Switch PS/2 with mouse-clicking function OSD, 19", 8-Port

- Control several PCs via a PS/2 keyboard, a PS/2 mouse and a monitor
- Easy installation - no additional software required
- PC selection via buttons, hot keys or mouse click
- Clear on-screen display (OSD)
- Excellent video quality - up to 1920 x 1440, 200MHz bandwidth
- Supports DDC, DDC2, DDC2B, DDC2AB
- Hot plug and play
- Keyboard and mouse emulation for error free booting of the computer
- Autoscan (5,10,15,20,25,30 sec. options) / autoskip function
- Power supply via mains adaptor; included
- Incl. 19" installation bracket 1HE
- Supports Standard-PS/2-Maus, Microsoft IntelliMouse plus complete support for Microsoft IntelliPoint 5.0 mouse drivers & Logitech Mouse ware-drivers
- Supports Windows 95/98/98SE/ME/NT4.0/2000/XP, DOS, Linux, Novell Netware, FreeBSD

DC IC818I-OSD-MC KVM Switch, PS/2, 8-Port

DIGITUS® Desktop KVM-Switch PS/2, OSD, 19", 16-Port

- Control several PCs via a PS/2 keyboard, a PS/2 mouse and a monitor
- Easy installation - no additional software required
- PC selection via buttons, hot keys or mouse click
- Clear on-screen display (OSD)
- Excellent video quality - up to 1920 x 1440, 200MHz bandwidth
- Supports DDC, DDC2, DDC2B, DDC2AB
- Hot plug and play
- Keyboard and mouse emulation for error free booting of the computer
- Autoscan (5,10,15,20,25,30 sec. options) / autoskip function
- Power supply via mains adaptor; included
- Incl. 19" installation bracket 1HE
- Supports Standard-PS/2-Maus, Microsoft IntelliMouse plus complete support for Microsoft IntelliPoint 5.0 mouse drivers & Logitech Mouse ware-drivers
- Supports Windows 95/98/98SE/ME/NT4.0/2000/XP, DOS, Linux, Novell Netware, FreeBSD

DC IC8116I KVM Switch, PS/2, 16-Port

DIGITUS® Video Booster, 250 MHz

- Built-in line amplifier, up to 65 m
- Maximum resolution 1920 x 1440 Pixel at 60 Hz
- Video bandwidth 250 MHz, DDC, DDC2, DDC2B support
- DDC, DDCB, DDC2B support
- Cascadable
- HDSUB 15 Male / Female

DC VS811 Video Booster

DIGITUS® Desktop KVM-Switch, 2- and 4-Port

NEW!

- Controls several PCs with one PS/2-keyboard, onePS/2-mouse and one monitor
- Simple installation - no additional software needed
- PC-choice over push-buttons or Hot-Key
- Excellent video quality - up to 2048 x 1536 @ 85Hz
- Supports DDC, DDC2
- Hot Plug and Play
- Emulates a keyboard on each PC to allow your computers to boot normally without a keyboard error
- Autoscan (5 to 250 sec.)
- No external power suply needed, self powered through PS/2 connection or USB connection
- Fully compliant with the USB 1.1/2.0 specification
- Supports Win 95/98/98SE/ME/NT4.0/2000/2003 Server/XP, Linux, Mac and Sun Micro Systems

DC-11101	KVM Switch 2-Port
DC-12101	KVM Switch 4-Port

DIGITUS® Desktop KVM-Switch, inkl. Audio, 2- and 4-Port

NEW!

- Controls several PCs with one PS/2-keyboard, one PS/2-mouse and one Monitor, incl. audio-supply
- Simple installation - no additional software needed
- PC-choice over push-buttons or Hot-Key
- Excellent video quality - up to 2048 x 1536 @ 85Hz
- Supports DDC, DDC2
- Hot Plug and Play
- Emulates a keyboard on each PC to allow your computers to boot normally without a keyboard error
- Autoscan (5 to 250 sec.)
- No external power supply needed, self powered through PS/2 connection or USB connection
- Fully compliant with the USB 1.1/2.0 specification
- Supports Windows 95/98/98SE/ME/NT4.0/2000/2003 Server/XP, Linux, Mac and Sun Micro Systems

DC-11301	KVM Switch 2-Port with Audio
DC-12301	KVM Switch 4-Port with Audio

DIGITUS® KVM-Switch with OSD, 8- and 16-Port

NEW!

- Controls several PCs with one PS/2-keyboard, onePS/2-mouse and one monitor
- Simple installation - no additional software needed
- PC-choice over push-buttons, Hot-Key or OSD (On Screen Display)
- Excellent video quality - up to 2048 x 1536 @ 85Hz
- Supports DDC, DDC2
- Hot Plug and Play
- Emulates a keyboard on each PC to allow your computers to boot normally without a keyboard error
- Autoscan (5 to 250 sec.)
- incl. external power supply unit DC 5V 2A
- incl. 19"-Rack mounted iron panel with screw
- Fully compliant with the USB 1.1/ 2.0 specification
- Supports Windows 95/98/98SE/ME/NT4.0/2000/2003 Server/XP, Linux, Mac and Sun Micro Systems

DC-13101	KVM Switch 8-Port with OSD
DC-14101	KVM Switch 16-Port with OSD

DIGITUS® Desktop Combo-KVM-Switch, 2- and 4-Port

NEW!

- Controls several PCs with one PS/2- or USB-keyboard, one PS/2- or USB-mouse and one monitor
- Simple installation - no additional software needed
- PC-choice over push-buttons or Hot-Key
- Excellent video quality - up to 2048 x 1536 @ 85Hz
- Supports DDC, DDC2
- Hot Plug and Play
- Emulates a keyboard on each PC to allow your computers to boot normally without a keyboard error
- Autoscan (5 to 250 sec.)
- No external power supply needed, self powered through PS/2 and/ or USB connection
- Fully compliant with the USB 1.1/ 2.0 specification
- Supports Windows 95/98/98SE/ME/NT4.0/2000/2003 Server/XP, Linux, Mac and Sun Micro Systems

DC-11202	Combo KVM Switch 2-Port
DC-12202	Combo KVM Switch 4-Port

DIGITUS® Desktop Combo-KVM-Switch, incl. Audio, 2- and 4-Port

NEW!

- Controls several PCs with one PS/2- or USB-keyboard, one PS/2- or USB-mouse and one monitor, incl. audio-suply
- Simple installation - no additional software needed
- PC-choice over push-buttons or Hot-Key
- Excellent video quality - up to 2048 x 1536 @ 85Hz
- Supports DDC, DDC2
- Hot Plug and Play
- Emulates a keyboard on each PC to allow your computers to boot normally without a keyboard error
- Autoscan (5 to 250 sec.)
- No external power supply needed, self powered through PS/2 connection or USB connection
- Fully compliant with the USB 1.1/2.0 specification
- Supports Windows 95/98/98SE/ME/NT4.0/2000/2003 Server/XP, Linux, Mac and Sun Micro Systems

DC-11401	Combo KVM Switch 2-Port with Audio
DC-12401	Combo KVM Switch 4-Port with Audio

DIGITUS® Combo-KVM-Switch with OSD, 8- and 16-Port

NEW!

- Controls several PCs with one PS/2- or USB-keyboard, one PS/2- or USB-mouse and one monitor
- Simple installation - no additional software needed
- PC-choice over push-buttons, Hot-Key or OSD (On Screen Display)
- Excellent video quality - up to 2048 x 1536 @ 85Hz
- Supports DDC, DDC2
- Hot Plug and Play
- Emulates a keyboard on each PC to allow your computers to boot normally without a keyboard error
- Autoscan (5 to 250 sec.)
- incl. external power supply unit DC 5V 2A
- incl. 19"-Rack mounted iron panel with screw
- Fully compliant with the USB 1.1/ 2.0 specification
- Supports Windows 95/98/98SE/ME/NT4.0/2000/2003 Server/XP, Linux, Mac and Sun Micro Systems

DC-13201	Combo KVM Switch 8-Port with OSD
DC-14201	Combo KVM Switch 16-Port with OSD

DIGITUS® Electronic Video Splitter, 2- to 16-port, 200 MHz

- Video bandwidth 200 MHz
- Maximum resolution 1280 x 1024
- Built-in line amplifi er, up to 65 m
- DDC, DDC2, DDC2B support
- Cascadable (max. 64)
- Metal housing for better EMI shielding

DC-VS812	Video Splitter 2-Port, 200 Mhz
DC-VS814	Video Splitter 4-Port, 200 Mhz
DC-VS818	Video Splitter 8-Port, 200 Mhz
DC-VS8116	Video Splitter 16-Port, 200 Mhz

DIGITUS® Video Splitter, 2- to 16-port, 400 MHz

- Video bandwidth 400 MHz
- Maximum resolution 2048 x 1536
- Built-in line amplifier, up to 65 m
- DDC, DDC2, DDC2B support
- Cascadable (max. 64)
- Metal housing for better EMI shielding

DC VS812PF	Video Splitter 2-Port, 400 Mhz
DC VS814PF	Video Splitter 4-Port, 400 Mhz
DC VS818PF	Video Splitter 8-Port, 400 Mhz
DC VS8116PF	Video Splitter 16-Port, 400 Mhz

DIGITUS® Video Matrix, 2- to 16-port, 250 MHz

- 2 switchable inputs (PC) , 2 outputs (Monitor)
- Built-in line amplifier, up to 65 m
- Maximum resolution 1920 x 1440 Pixel at 60 Hz
- Video bandwidth 250 MHz
- DDC, DDC2, DDC2B support
- Cascadable

DC VX-8202	Video Matrix 2-Port, 400 Mhz
DC VX-8204	Video Matrix 4-Port, 400 Mhz
DC VX-8208	Video Matrix 8-Port, 400 Mhz
DC VX-8216	Video Matrix 16-Port, 400 Mhz

DIGITUS® Video Selector, 2- to 8-Port

- Ideal for school class, workshops, training rooms etc.
- 2 inputs (PC), 1 output (Monitor, Beamer etc.)
- Maximum resolution 1920 x 1440 Pixel @ 60 Hz
- Video bandwidth 250 MHz
- DDC, DDC2, DDC2B support

DC VRM812E	Video Selector 2-Port, 250 Mhz
DC VRM814E	Video Selector 4-Port, 250 Mhz
DC VRM818	Video Selector 8-Port, 250 Mhz

DIGITUS® DVI Splitter, 2- to 8-Port

- Maximum resolution 1600 x 1200 Pixel @ 60 Hz
- By Panel Link Digital Technik highest Video resolution, up to UXGA
- UXGA 25 - 165 MHz
- Input: DVI-I Female
- Outputs: DVI-I Female
- Cable lenght between Monitor and Splitter up to 10m

DC DS-812F	DVI Splitter 2-Port
DC DS-814F	DVI Splitter 4-Port
DC DS-818F	DVI Splitter 8-Port

DIGITUS® DVI Selector, 4- to 8-Port

- 4 inputs (PC), 1 output (Monitor, Beamer etc.)
- Ideal for school class, workshops, training rooms etc.
- Combines Analog and Digital Video Signal output
- Maximum resolution 1920 x 1440 Pixel at 60 Hz
- Supports DDC2B at analog Video output
- Input: DVI-I Female
- Outputs: DVI-I Female

DC DRM-812F	DVI Selector 2-Port
DC DRM-814F	DVI Selector 4-Port

DIGITUS® 19" Console with 15" TFT Monitor, 1U

- Non reflective and break-proof 15" LCD monitor
- Active Matrix LCD Panel
- Max. resolution: 1074 x 768 @ 75Hz
- VGA/SVGA/XGA/SXGA Display Mode 16.7 Mio. colors
- Contrast rate 500:1, Brightness 250 cd/m2
- Space saving steel sheet housing (1U height), black RAL 9005
- Dimensions (WxDxH): 447mm x 600mm x 48 mm

integrated console in DIGITUS® Network Racks

DC IC-1501GE	19" Console with german keyboard
DC IC-1501US	19" Console with US keyboard

DIGITUS® 19" Console 15" TFT with 8-Port KVM switch, 1U

- 19" Control Panel with 15" TFT, keyboard, mouse and built-in 8 port KVM switch
- Space saving steel sheet housing (1U height), black RAL 9005
- Control up to 256 computers by cascading KVM
- OSD control
- Monitors PC status by Auto Scan function.
- Resolution of 1024x768, 75Hz
- Easy to install, no additional software or hardware required
- Supports hot plug
- Dimensions (WxDxH): 447mm x 600mm x 48 mm

DC IC-1508GE	19" Console, KVM, german kb.
DC IC-1508US	19" Console, KVM, US kb.

DIGITUS® 19" Console with 17" TFT Monitor, 1U

- Non reflective and break-proof 17" LCD monitor
- Active Matrix LCD Panel
- Max resolution: 1280 x 1024 @ 75Hz
- VGA/SVGA/XGA/SXGA Display Mode 16.7 Mio. colors
- Contrast rate 500:1, Brightness 250 cd/m2
- Space saving steel sheet housing (1U height), black RAL 9005
- Dimensions (WxDxH): 600mm x 450mm x 48 mm

DC IC-1701GE	19" Console with german keyboard
DC IC-1701US	19" Console with US keyboard

DIGITUS® 19" Console 17" TFT with 8 port KVM switch, 1U

- 19" Control Panel with 17" TFT, keyboard, mouse and built-in 8 port KVM switch
- Space saving steel sheet housing (1U height), black RAL 9005
- Control up to 256 computers by cascading KVM
- OSD Control
- Monitors PC status by Auto Scan function
- Resolution of 1280x1024, 75Hz
- Easy to install, no additional software or hardware required
- Supports hot plug
- Dimensions (WxDxH): 600mm x 450mm x 48 mm

DC IC-1708GE	19" Console, KVM, german kb.
DC IC-1708US	19" Console, KVM, US kb.

DIGITUS® Professional - Line
19“ Network Cabinet

separated cable guide


lockable side wall

integrated ventilation slot


horizontal cable channel

- 1.5 mm - 2 mm strong sheet steel with high load capacity
- Painted, light grey (RAL 7035)
- Side sections detachable and lockable
- Ventilation slots for passive ventilation and exhaustion
- Protection class IP 40
- Framed safety glass door, opening angle 180° with lockable swing handle, optionally available as a double-wing door
- Lockable steel rear door
- Spring-mounted hinges enable easy installation of the door or door stop
- Up to 500kg load-bearing capacity
- Adjustable 19“ profile rails in depth, front and rear sides
- Large cable entry with rubber-edged sliding mechanism on the floor, as protection against cable breakage and damage, and ensures the fixation of large bundles of cable.
- Cable feeds with brush strips
- Completely earthed
- Height-adjustable levelling feet for the equalisation of uneven floors
- Roof module for ventilation unit
- Incl. set of 28 × 19“ assembly screws
- Lateral cable routing panel for DN-19 32U-8/8 and DN-19 42U-8/8
- Extensive range of accessories available

DN-19 22U-6/6	22 U 1200 x 600 x 600mm (HxWxD)	59 kg
DN-19 26U-6/6	26 U 1310 x 600 x 600mm (HxWxD)	68 kg
DN-19 26U-6/8	26 U 1390 x 600 x 800mm (HxWxD)	75 kg
DN-19 32U-6/6	32 U 1650 x 600 x 600mm (HxWxD)	83 kg
DN-19 32U-6/8	32 U 1580 x 600 x 800mm (HxWxD)	95 kg
DN-19 32U-8/8	32 U 1580 x 800 x 800mm (HxWxD)	105 kg
DN-19 42U-6/6	42 U 2020 x 600 x 600mm (HxWxD)	107 kg
DN-19 42U-6/8	42 U 2020 x 600 x 800mm (HxWxD)	121 kg
DN-19 42U-8/8	42 U 2020 x 800 x 800mm (HxWxD)	131 kg
DN-19 42U-8/8-ZT	42 U 2020 x 800 x 800mm (HxWxD)	131 kg (2-door-opening)

DIGITUS® Eco-Line
19“ Network Cabinet, disassembled

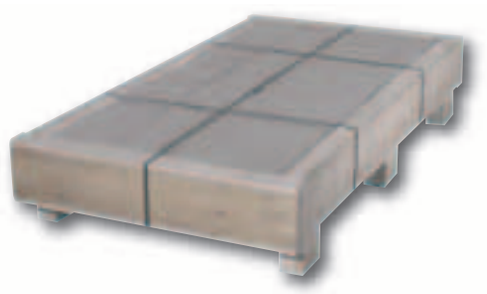
delivery status (packed 2000 x 1000 x 400mm)

- 1.5mm - 2mm strong sheet steel with high load capacity
- Painted light grey (RAL 7035)
- 600mm wide, 800mm deep
- Ventilation slots for passive ventilation and exhaustion
- Protection class IP 40
- Framed safety glass door , opening angle 180° with lockable swing handle, optionally available as a double-wing door
- Lockable steel rear door
- Up to 400kg loading capacity
- 19“ profi le rails ajustable in depth, front and back
- Large cable entry with rubber-edged sliding mechanism on the floor, as protection against cable breakage and damage, and ensures the fixation of large bundles of cable.
- Height adjustable feet to compensate for uneven floors
- Ceiling module for ventilation unit
- Incl. 28 piece set of mounting screws
- The accessories are identical to the DIGITUS® Professional-Line cabinets apart from the ceiling fans and bases

DN-19 22U-6/8-EC	22U 1150 x 600 x 800mm (HxWxD)	62,0 kg
DN-19 32U-6/8-EC	32U 1590 x 600 x 800mm (HxWxD)	81,5 kg
DN-19 42U-6/8-EC	42U 2020 x 600 x 800mm (HxWxD)	101,0 kg

DIGITUS® SoHo - Line
19" Wall Mounting Cabinets

- 1,1mm-1,5mm strong sheet steel with high load capacity, grey (RAL 7035)
- Side sections detachable and lockable
- Ventilationslots for passive ventilation and exhaustion
- Protection rating IP 40
- Safety-Glass door with steel frame and lockable
- 2 x 19" profile rails
- Cable entry on top and bottom
- Incl. 8 pieces mounting set
- Grounded
- Extensive accessories available

easiest wall mounting



lockable side walls

DN-19 07-U	7 U 380 x 600 x 450mm (HxWxD), 21 kg
DN-19 09-U	9 U 470 x 600 x 450mm (HxWxD), 23 kg
DN-19 12-U	12 U 600 x 600 x 450mm (HxWxD), 26 kg
DN-19 16-U	16 U 780 x 600 x 450mm (HxWxD), 30 kg
DN-19 07U-6/6	7 U 380 x 600 x 560mm (HxWxD), 25 kg
DN-19 09U-6/6	9 U 470 x 600 x 560mm (HxWxD), 28 kg
DN-19 12U-6/6	12 U 600 x 600 x 560mm (HxWxD), 32 kg
DN-19 16U-6/6	16 U 780 x 600 x 560mm (HxWxD), 36 kg

DIGITUS® SoHo - Line
Double Section 19" Wall Mounting Cabinets

- 1,1mm – 1,5mm strong sheet steel with high load capacity, light grey (RAL 7035)
- Side sections detachable and lockable
- Ventilationslots for passive ventilation and exhaustion
- Double Section, lockable
- Protection rating IP 40
- Safety-Glass door with steel frame and lockable
- 2 x 19" profiles
- Cable entry on top and bottom
- Incl. 8 pieces mounting set
- Grounded
- Extensive accessories available

double section

cable guide with brush strip

DN-19 07-U-3	7 U Double Section 380 x 600 x 560mm (HxWxD), 27kg
DN-19 09-U-3	9 U Double Section 470 x 600 x 560mm (HxWxD), 31kg
DN-19 12-U-3	12 U Double Section 600 x 600 x 560mm (HxWxD), 35kg
DN-19 16-U-3	16 U Double Section 780 x 600 x 560mm (HxWxD), 39kg

DIGITUS® Eco - Line
19" Wall Mount Cabinets, disassembled

- 1,1mm – 1,5mm strong sheet steel with high load capacity, grey (RAL 7035))
- Ventilation slots for active and passive ventilation
- Safety-Glass door with steel frame and lockable
- 2 x 19" profiles
- Cable entry on top and bottom
- Incl. 8 pieces mounting set
- Incl. 1 piece brush for cable entry
- Load capacity 20 kg
- Top-floor module for Fan unit
- Extensive accessories available

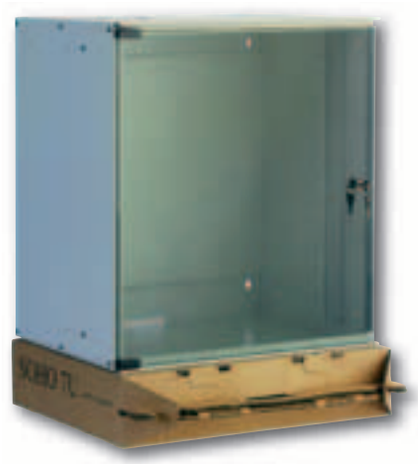

DN-19 07-U-S	7 U 360 x 520 x 400mm (HxWxD), 12,0 kg
DN-19 09-U-S	9 U 450 x 520 x 400mm (HxWxD), 15,0 kg
DN-19 12-U-S	12 U 580 x 520 x 400mm (HxWxD), 22,5 kg

DIGITUS® CAT 5e STP Desktop Patch Panel 8-Port, 1U

- Manufactured at Category 5e, EIA/TIA 568 and ISO/IEC DIS 11801
- 8 x shielded RJ45 sockets
- Sheet steel housing and screen cover
- 8 x LSA color-coded connection strip
- Clamp strain relief
- Central ground
- Cable fixture.

DN-10001	Desktop Patch Panel, 8-Port

DIGITUS® CAT 5e Wall Outlets shielded

- Category 5e, EIA TIA 568 and ISO IEC 11801 / EN 50173
- Suitable up to 100 MHz
- Shielded RJ 45 sockets 8P8C, strain relieving 45° socket angle
- Integrated installation cable strain relief
- Shielding from enclosed metal die cast housing
- On wall / in wall ready
- Cable installation via LSA strips, colour codes based on EIA/TIA 568 A & B

DN-9001-N	flush mount
DN-9001/B5-N	flush mount (5 pcs.)
DN-9002-N	surface mount
DN-9002/B5-N	surface mount (5 pcs.)

DIGITUS® CAT 6 Wall Outlets shielded

- Category 6, EIA TIA 568, ISO IEC 11801 Class E, EN 50173
- For up to 250 MHz
- Shielded RJ45 sockets, 8P8C, strain relieving 40°socket angle
- Integrated installation cable strain relief
- Shielded RJ45 sockets due to enclosed metal die cast housing
- On wall / in wall ready
- Cable installation via LSA strips, colour codes based on EIA/TIA 568 A & B

DN-9005-N	flush mount
DN-9005/B5-N	flush mount (5 pcs.)
DN-9006-N	surface mount
DN-9006/B5-N	surface mount (5 pcs.)

DIGITUS® KVM-Switch Cable with PS/2 to USB Converter

- Built-in PS/2 to USB converter
- Cable length: 3m
- Requires no external power supply
- Compatible with USB 1.0/1.1/2.0 specifi cation
- Supports UHCI, OHCI, & EHCI USB controller
- For PS/2 KVM switches
- Works with PC, notebooks, Macintosh, SUN Micro
- For KVM switches with FEMALE monitor connection (DA-70150)
- For KVM switches with MALE monitor connection (DA-70151)

DA-70150	PS2 to USB (female)
DA-70151	PS2 to USB (male)

DIGITUS® KVM-Extender 150m, CAT5

- KVM signal booster up to 150m more than standard CAT5 cable
- Transmitter and receiver unit in a sturdy metal case
- Two users (local and „remote") alternatively
- Easy installation and setting – no software required
- Max. resolution of transmitter unit (1600 x 1200), receiver unit (1280 x 1024)
- LED status display
- Compatible with DOS, Windows, Linux, UNIX, Netware
- Dimensions (WxDxH): 174mm x 116mm x 30mm

DC KVM-EXT150-1	KVM-Extender 150m

DIGITUS® Network- and Communikation Cable Tester, RJ45 and BNC

- Test function for cables with RJ45, RJ12, RJ11 and BNC male.
- Auto-scan and step by step testing.
- loop-back: for testing and localising of already laid network or communication cables.
- continuity: for continuity testing of network or communication cables.
- open: for localising of disconnected single wires.
- shorts: locating of short-circuited single wires.
- miss-wire: identification of non-conform wire assignment.
- pin to pin configuration: 1 assignment testing.
- Main device with 2 x RJ45 female, remote unit with 1 x RJ45 female.
- Various LEDs for status display, operates with 9 Volt block battery.
- Includes two-language manual and modular BNC adapter.

DN-14001	Network Cable Tester, RJ45/BNC

DIGITUS® UTP Twisted Pair CAT 5e Installation Cable

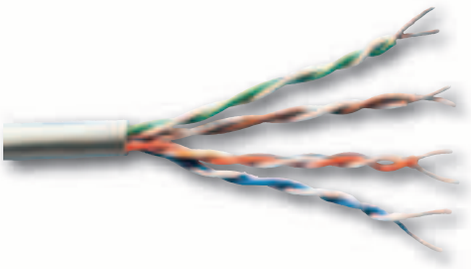

- Unshielded CAT 5e installation cable
- 4 x 2 AWG 24/1, PVC
- 3P CAT5e certified
- According to EIA/TIA 568 B.2, EN 50173-1, ISO/IEC 11801

ATUP-V1T	100 m, PVC
ATUP-V305T	305 m, PVC

DIGITUS® UTP Twisted Pair CAT 6 Installation Cable

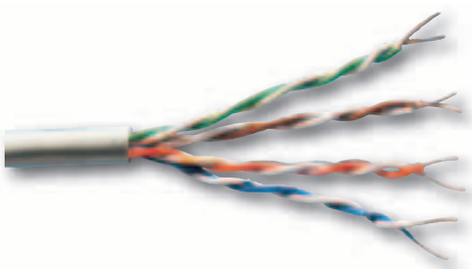

- Unshielded CAT 6 installation cable
- 4 x 2 AWG 23/1, PVC
- 3P certified
- According to EIA/TIA 568 B.2, EN 50173-1, ISO/IEC 11801

ATU6-V1T	100 m, PVC
ATU6-V305T	305 m, PVC

DIGITUS® FTP Twisted Pair CAT 5e Installation Cable

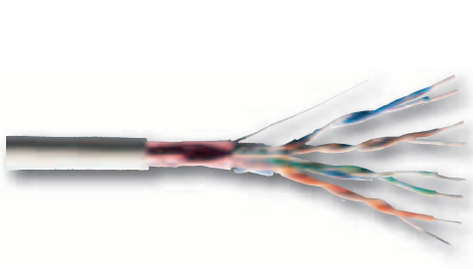

- Foil shielded CAT 5e installation cable.
- 4 x 2 AWG 24/1, PVC
- 3P Cat 5e certified
- According to EIA/TIA 568 B.2, EN 50173-1, ISO/IEC 11801

ATFP-V1T	100 m, PVC
ATFP-V305T	305 m, PVC

DIGITUS® SFTP Twisted Pair CAT 5e Installation Cable

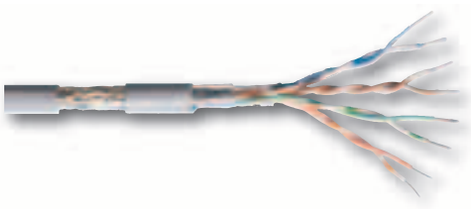

- Foil and braid shielded CAT 5e installation cable
- 4 x 2 AWG 24/1
- 3P Cat 5e certified
- According to EIA/TIA 568 B.2, EN 50173-1, ISO/IEC 11801

ATSFP-V1T	100 m, PVC
ATSFP-V305T	305 m, PVC

DIGITUS® SSTP Twisted Pair CAT 6 Installation Cable

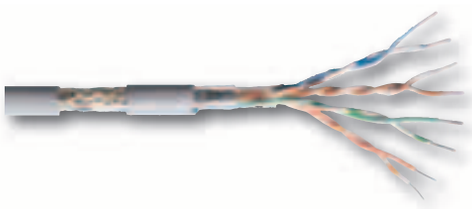

- Pair shielded, AL laminated foil, full shielded CU braid, CAT 6 installation cable
- 4 x 2 x AWG 23/1 halogen free
- 3P certified
- According to EIA/TIA 568 B.2, EN 50173-1, ISO/IEC 11801

ATSSP6-VH1T	100 m, LSOH
ATSSP6-VH305T	305 m, LSOH

DIGITUS® SSTP PIMF Twisted Pair CAT 7 Installation Cable

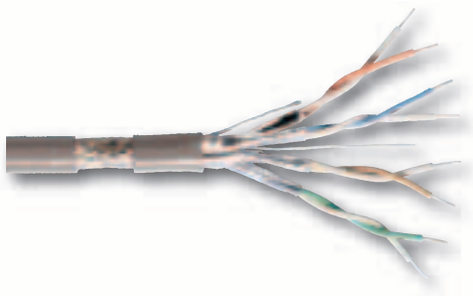

- Pair shielded, AL laminated foil, full shielded CU braid, CAT 7 installation cable
- 4 x 2 x AWG 23/1 halogen free
- According to EIA/TIA 568 B.2, EN 50173-1, ISO/IEC 11801

ATP7-VH305T	305 m, LSOH
ATP7-VH5T	500 m, LSOH

DIGITUS® CAT 5e Patchcable

- Shielded and unshielded CAT 5e patch cable
- 4 x 2 AWG 26/7, twisted pair, 100 Ohm
- 2 x RJ45 Connectors
- Boot with kink protection and strain relief
- Spot length on boot

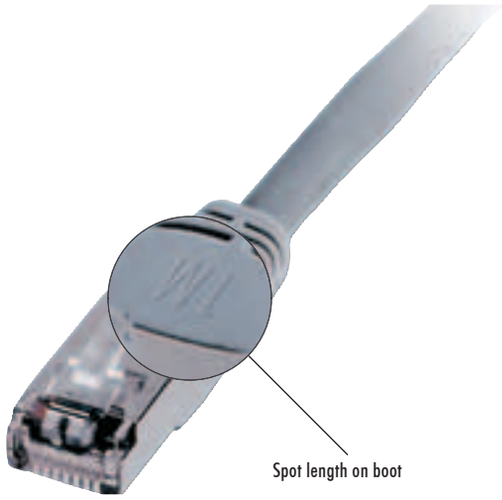

In DIGITUS polybag!

DIGITUS® UTP CAT 5e Patchcable, unshielded

	GREY	RED	YELLOW	GREEN	BLUE
0,5m		DK-1512-005/R	DK-1512-005/Y	DK-1512-005/G	DK-1512-005/B
1,0m	DK-1512-010	DK-1512-010/R	DK-1512-010/Y	DK-1512-010/G	DK-1512-010/B
2,0m	DK-1512-020	DK-1512-020/R	DK-1512-020/Y	DK-1512-020/G	DK-1512-020/B
3,0m	DK-1512-030	DK-1512-030/R	DK-1512-030/Y	DK-1512-030/G	DK-1512-030/B
5,0m	DK-1512-050	DK-1512-050/R	DK-1512-050/Y	DK-1512-050/G	DK-1512-050/B
7,0m	DK-1512-070	DK-1512-070/R	DK-1512-070/Y	DK-1512-070/G	DK-1512-070/B
10,0m	DK-1512-100	DK-1512-100/R	DK-1512-100/Y	DK-1512-100/G	DK-1512-100/B
15,0m	DK-1512-150	DK-1512-150/R	DK-1512-150/Y	DK-1512-150/G	DK-1512-150/B
20,0m	DK-1512-200	DK-1512-200/R	DK-1512-200/Y	DK-1512-200/G	DK-1512-200/B

DIGITUS® FTP CAT 5e Patchcable, shielded

	GREY	RED	YELLOW	GREEN	BLUE
0,5m	DK-1522-005	DK-1522-005/R	DK-1522-005/Y	DK-1522-005/G	DK-1522-005/B
1,0m	DK-1522-010	DK-1522-010/R	DK-1522-010/Y	DK-1522-010/G	DK-1522-010/B
2,0m	DK-1522-020	DK-1522-020/R	DK-1522-020/Y	DK-1522-020/G	DK-1522-020/B
3,0m	DK-1522-030	DK-1522-030/R	DK-1522-030/Y	DK-1522-030/G	DK-1522-030/B
5,0m	DK-1522-050	DK-1522-050/R	DK-1522-050/Y	DK-1522-050/G	DK-1522-050/B
7,0m	DK-1522-070	DK-1522-070/R	DK-1522-070/Y	DK-1522-070/G	DK-1522-070/B
10,0m	DK-1522-100	DK-1522-100/R	DK-1522-100/Y	DK-1522-100/G	DK-1522-100/B
15,0m	DK-1522-150	DK-1522-150/R	DK-1522-150/Y	DK-1522-150/G	DK-1522-150/B
20,0m	DK-1522-200	DK-1522-200/R	DK-1522-200/Y	DK-1522-200/G	DK-1522-200/B

DIGITUS® SFTP CAT 5e Patchcable, double shielded

	GREY	RED	YELLOW	GREEN	BLUE
0,5m	DK-1532-005	DK-1532-005/R	DK-1532-005/Y	DK-1532-005/G	DK-1532-005/B
1,0m	DK-1532-010	DK-1532-010/R	DK-1532-010/Y	DK-1532-010/G	DK-1532-010/B
2,0m	DK-1532-020	DK-1532-020/R	DK-1532-020/Y	DK-1532-020/G	DK-1532-020/B
3,0m	DK-1532-030	DK-1532-030/R	DK-1532-030/Y	DK-1532-030/G	DK-1532-030/B
5,0m	DK-1532-050	DK-1532-050/R	DK-1532-050/Y	DK-1532-050/G	DK-1532-050/B
7,0m	DK-1532-070	DK-1532-070/R	DK-1532-070/Y	DK-1532-070/G	DK-1532-070/B
10,0m	DK-1532-100	DK-1532-100/R	DK-1532-100/Y	DK-1532-100/G	DK-1532-100/B
15,0m	DK-1532-150	DK-1532-150/R	DK-1532-150/Y	DK-1532-150/G	DK-1532-150/B
20,0m	DK-1532-200	DK-1532-200/R	DK-1532-200/Y	DK-1532-200/G	DK-1532-200/B

DIGITUS® USB 2.0 Connection Cable, A to B

- Double shielded
- Cable UL2725, 2 x AWG24, 2 x AWG28
- USB 2.0 compatible and certified

DB-117797	2m
DB-117803	3m
DB-117810	5m

DIGITUS® USB 2.0 Extension Cable, A to A

- Double shielded
- Cable UL2725, 2 x AWG24, 2 x AWG28
- USB 2.0 compatible and certified

DB-130260	2m
DB-130277	3m
DB-130284	5m

DIGITUS® Firewire Connection Cable, 1,8m

- 1394A 6-pin male <> 1394A 6-pin male
- IEEE 1394A compatible
- The maximum data transfer rate is 400 Mbps.

DB-051718	Firewire 6 pin - 6 pin
DB-051725	Firewire 6 pin - 4 pin
DB-051732	Firewire 4 pin - 4 pin

DIGITUS® Patch Cable, FTP, CAT 5E



- Foil shielded CAT 5e patch cable
- 4 x 2 AWG 26/7, TwistedPair, 100 Ohm, 2 x RJ45 Pin Male
- Boot with kink protection and strain relief

DB-800316	1 m
DB-800415	3 m
DB-800460	5 m
DB-800569	10 m
DB-082651	20 m
DB-082668	30 m
DB-066583	2 x RJ45 female, Modular Coupler

DIGITUS® Patch Cable, SSTP/PIMF, CAT 6, AWG 26

- Pairs with foil and full braid shilding (PIMF) patch cable
- 4 x 2 x AWG 26/7, twisted pair, 100 Ohm, 2 x RJ45, 50 μ gold plated
- Boot with kink protection and strain relief, spot length on boot
- 3 P Cat 6 Channel Link certified, connection 1 : 1

DB-122814	1 m
DB-122838	3 m
DB-122845	5 m
DB-122869	10 m
DB-122883	20 m
DB-122890	30 m
DB-132806	2 x RJ45 female, Inline Coupler

DIGITUS® ATA and SATA Cable

- 80-wire cable in plastic sheath, AWG 30
- Jacket and hoods in grey, material PVC
- 40-pin IDC in various colours
  (blue = controller, black = master, grey = slave)

DB-106241	ATA 133 HDD Cable, 60cm
DB-106258	ATA 133 HDD Cable, 90cm
DB-129653	SATA - 4 PIN Connector 15cm
DB-153191	SATA - SATA 150 Cable, 50cm
DB-121695	SATA - SATA 150 Cable, 75cm
DB-183037	SATA - SATA 150 Cable, 50cm, angled

DIGITUS® Monitor Cable, VGA

- Molded hoods
- Cable UL2919
- 3 x coax for RGB and 4 x AWG28 signal wires

DB-064046	HD DB15 M - HD DB15 M, 1,8m
DB-063148	HD DB15 M - HD DB15 F, 1,8m
DB-086260	Mini-Din 4M - Mini-Din 4M, 2m
DB-083672	DVI - VGA

DIGITUS® Monitor Cable , DVI, Ferrite Cores

- Cable UL20276
- With ferrite filter and thumb screws
- Assignment 18+1 = (Single Link)

DB-120865	2 X DVI-D/M (24+1), 2m
DB-162629	2 X HDMI TYP A (19 POL.), 1,8m
DB-162636	2 X HDMI TYP A (19 POL.), 3m
DB-162643	2 X HDMI TYP A (19 POL.), 5m
DB-171706	Adapter HDMI Typ A-DVI-D

DIGITUS® Wireless LAN antenna Cable

- SMA reversed jack <-> SMA plug
- Gold plated contacts
- RG 316 Coaxial Cable

DB-180746	1m
DB-192732	2m
DB-180753	3m

DIGITUS® Multifunctional Display Set

Shelf-Top Display

(example - delivery without products) Bulk Material Display

You have the option of using the set as two separate display units – the bulk material display and the shelf-top display - or in combination as an ideal product display within your sales area.

Give your imagination a free rein and make the best use of the additional material supplied, such as the step riser or the vertical partition, for the presentation of different products.

The supplied catalogue holder can be sited on either side. Special catalogues for easiest cross-selling and suggested stocking combination are available. Please contact your DIGITUS® distribution partner.

- Easy to handle
- Universally usable
- Simple assembly
- Column dimensions: 77 cm high, Ø 42 cm
- Tray dimensions: 53 cm wide, 47 cm deep, 19 cm high
- High-quality and solid workmanship
- Material: corrugated board

DM-60102 Display Set (DM-60100, DM-60101)
DM-60100 Bulk Material Display
DM-60101 Shelf-Top-Display

DIGITUS® Hook Bar

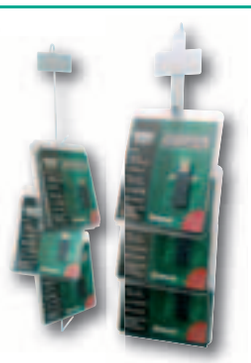

(example - delivery without products)

With the DIGITUS® hook bar, you can achieve the ideal product display of your blister products in your available sales area.

- Dimensions DM-70103: 115 cm long, 13 hooks
- Dimensions DM-70104: 125 cm long, 11 hooks
- Material: metal
- Top sign sticker inclusive

DM-70103 Hook Bar frontal
DM-70104 Hook Bar collateral

DIGITUS® Countertop Display

(example - delivery without products)

Use the display for DIGITUS® stackable goods or product blisters as well as for bulk goods such as cables and give-aways. The display is set up in seconds and ready for immediate use.

The supplied catalogue holder can be sited on either side. Special catalogues for easiest cross-selling and suggested stocking combination are available. Please contact your DIGITUS® distribution partner.

- Universally usable
- Simple assembly
- Tray dimensions: 35 cm wide, 29 cm deep, 15 cm high
- Step riser and 3 top banners included

DM-60103 Countertop Display

DIGITUS® Bag Display

(example - delivery without products)

The DIGITUS® bag display can hold at least 4 notebook bags on each of its 8 poles.

- High-quality and solid workmanship
- Dimensions: 185 cm high, Ø 120 cm
- Pole length: 50 cm
- Material: metal

DM-70102 Bag Display

DIGITUS® Countertop Blister Rack System

(example - delivery without products)

Use the display for all DIGITUS® blister products, preferably for takeaway products on your retail counter. Give your imagination a free rein and position the supplied hooks on the pegboard wherever you wish.

Suggested stocking combination are available. Please contact your DIGITUS® distribution partner.

- High-quality and solid workmanship
- Dimensions: 35 cm wide, 57 cm high, 25 cm deep
- Material: metal
- Color: silver
- 5 blister hooks included (16 cm)

DM-70101 Countertop Blister Rack System

DIGITUS® Blister Rack System

Special accessories separate available:

catalogue holder

lower shelf

positioner

anti-theft lock

price tag

The DIGITUS® multifunctional shelving system is the ideal product display in the retail environment. The 35 blister hooks (supplied) can be place anywhere on the pegboard. Please ask for details of the stocking options available.

- Assembled in seconds
- High-quality and solid workmanship
- Dimensions: 61,5 cm wide, 195 cm high, 51 cm deep
- Material: metal
- Color: silver

DM-70100 Blister Rack System

DIGITUS®

Enjoy connections. Live.

DIGITUS® distributed by:

MA-DIG-MAIL-0306-EN

Please find the complete DIGITUS assortment of high quality computer and network accessories online at:

www.digitus.info

Offer subject to change. All Information provided without guarantee. Subject to error and technical changes. Delivery only while supplies last. The general terms of business of the listed distributors apply. We accept no liability for printing errors. Digitus ist a registered trademark.